

Data Sheet for Article: NLKMBS03WB

Emerg.lum.KMB 4x0,5W HighPowerLED 3h 230V AC WirelessConnect

Black, universal mounting, with LiFePO₄ battery, emergency luminaire for illuminating escape routes, with Bluetooth communication., 190lm



Technical Data



Net length (mm)	250,00
Net width (mm)	34,00
Net height (mm)	50,00
Net weight (kg)	0,29
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessConnect
Version	Plastic luminaire
Design	KMB
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9005 (black)
Backup time (h)	3
Illuminant	LED (2W)

Technical Data - continued




Lumen	190
Voltage range (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Battery (V/Ah)	3,2/3,3 LiFePO4
IP Rating	IP54
Impact Resistance	≥ IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

NLKMB...

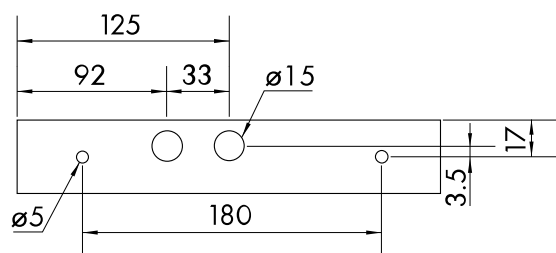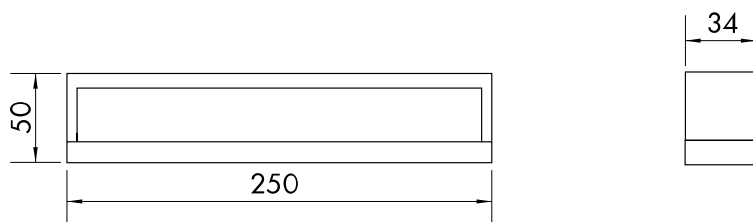

NLKME

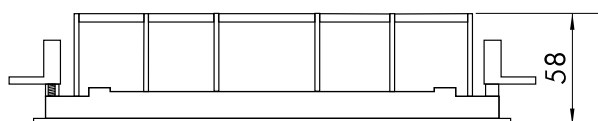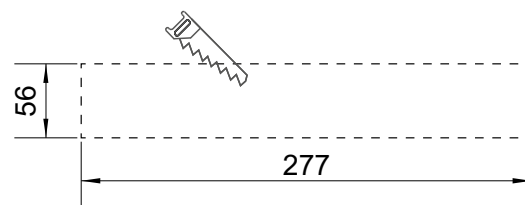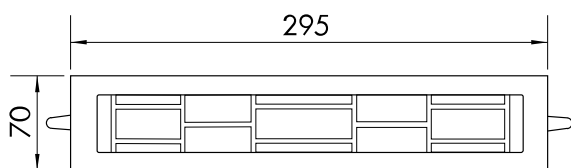

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	1,66	4,42	7,55	10,74	4,54
2,50	1,64	4,76	8,42	12,16	5,10
3,00	1,67	4,74	9,08	13,39	5,57
3,50	1,63	4,65	9,52	14,49	5,97
4,00	1,59	4,72	10,03	15,48	3,78
5,00	1,19	4,62	7,33	14,22	2,89

Article Table

DESCRIPTION	Order No.
Emerg.lum.KMB 4x0,5W HighPowerLED 3h 230V AC WirelessConnect Black, universal mounting, with LiFePO4 battery, emergency luminaire for illuminating escape routes, with Bluetooth communication., NLKMBS03WB 190lm	
Optional Accessories	
Recessed frame black for CPS luminaires Design KM,KMB,KS Required ceiling cut out: 277 x 56 mm	NLKMES
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phosphosphate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4