

Data Sheet for Article: NLKMUS03WB

Emerg.lum.KM 4x0,5W HighPower LED 3h 230V AC WirelessConnect

Black, universal mounting, with LiFePO4 battery, exit sign luminaire, with Bluetooth communication.



Technical Data

Net length (mm)	250,00
Net width (mm)	34,00
Net height (mm)	174,00
Net weight (kg)	0,60
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessConnect
Version	Plastic luminaire
Design	KM
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9005 (black)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010

Technical Data - continued


Viewing distance (m)	24
Backup time (h)	3
Illuminant	LED (2W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Battery (V/Ah)	3,2/3,3 LiFePO4
IP Rating	IP54
Impact Resistance	IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

NLKM...



NLKME

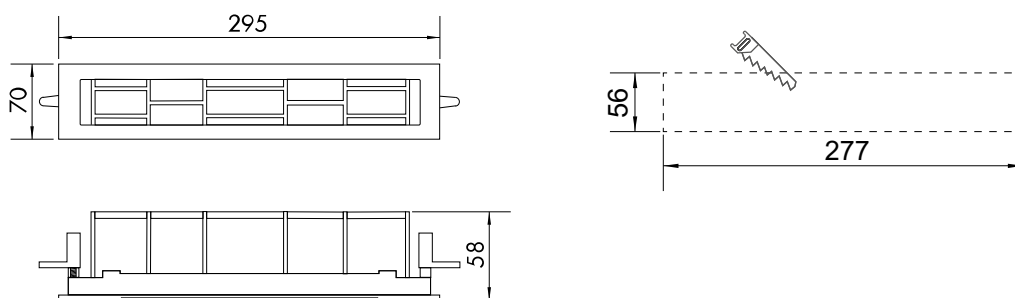

Drilling distances (mm)



Article Table

DESCRIPTION	Order No.
Emerg.lum.KM 4x0,5W HighPower LED 3h 230V AC WirelessConnect Black, universal mounting, with LiFePO4 battery, exit sign luminaire, with Bluetooth communication.	NLKMUS03WB
Optional Accessories	
Recessed frame black for CPS luminaires Design KM,KMB,KS Required ceiling cut out: 277 x 56 mm	NLKMES
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4