


Self-contained luminaire KW self-contr.LED 3h 230V ceiling m

1h/3h/8h adjustable, suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m

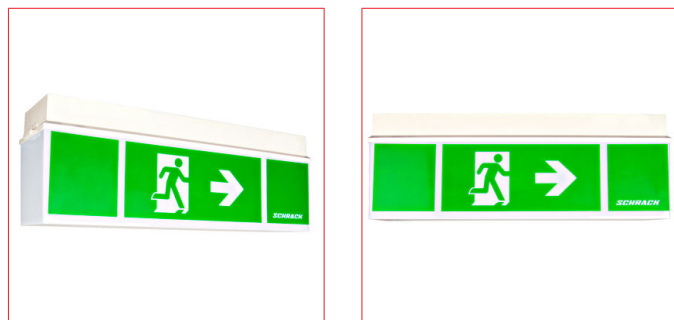


Technical Data

Net length (mm)	360,00
Net width (mm)	92,00
Net height (mm)	125,00
Net weight (kg)	1,30
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	KW
Halogen-free	Housing made of halogen-free plastic
Colour	White
Viewing distance (m)	16
Backup time (h)	3
Illuminant	HP-LED (3W)
Lumen	1h: 300;3h: 300;8h: 120
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	9,6/2,0 NiMh
IP Rating	IP54
Mounting	surface mounting ceiling
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

NLKWD...

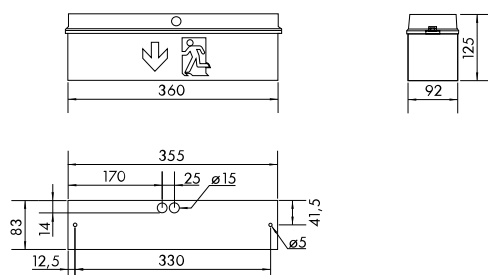

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 - 1h, 3h autonomy time

Montagehöhe [m]					
2,00	2,65	7,29	6,52	5,68	2,07
2,50	2,68	7,58	6,78	5,94	2,02
3,00	2,52	7,69	6,87	6,03	1,87
3,50	2,19	7,63	6,79	5,94	1,56
4,00	1,54	7,39	6,53	5,68	0,92

Article Table

DESCRIPTION	Order No.
Self-contained luminaire KW self-contr.LED 3h 230V ceiling m	
1h/3h/8h adjustable, suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram NLKWD003SC on one side, viewing distance: 16m	
Optional Accessories	
Crystal-clear wall cover for KW	NLKWC
Ball protection gasket for KW	NLBKW
Pictograph Set f. luminaires Design KW left, right, straight	NLKW0103
High Cover for ceiling mounting of emerg. lamp KW, opaque	NLKWH
Accu NiMH 9,6V 2,0 Ah for self contained luminaires ERT-LED	NLAKKU9620
Suitable for LPU module	
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001