

Emerg.luminaire KW ERT-LED 230V ceiling mounting

suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m



Technical Data


Net length (mm)	360,00
Net width (mm)	92,00
Net height (mm)	125,00
Net weight (kg)	0,70
Luminaire type	safety luminaire emergency sign luminaire Combined rescue path and rescue sign luminaire
Self contained - central battery	Central power supply luminaire
Function	standard
Version	Plastic luminaire
Design	KW
Halogen-free	Housing made of halogen-free plastic
Colour	White
Viewing distance (m)	16
Illuminant	ERT-LED (4W)
Lumen	520
Voltage range (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP Rating	IP54
Mounting	surface mounting ceiling
AA Class E 8101	AA4

Technical Data - continued

Manufacturer

Schrack

Dimensions (mm)

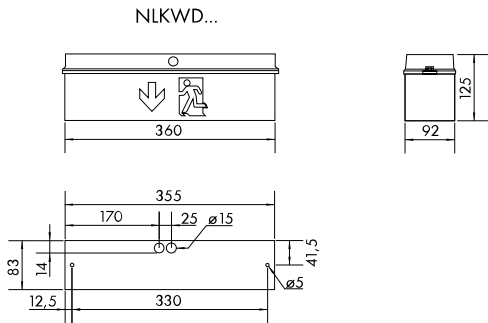

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	3,46	9,46	7,98	6,13	2,30
2,50	3,57	9,93	8,36	6,47	2,33
3,00	3,58	10,22	8,57	6,65	2,26
3,50	3,38	10,35	8,62	6,67	2,02
4,00	3,13	10,32	8,51	6,53	1,62

Article Table

DESCRIPTION	Order No.
Emerg.luminaire KW ERT-LED 230V ceiling mounting suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m	NLKWD039
Optional Accessories	
Crystal-clear wall cover for KW	NLKWC
Ball protection gascet for KW and C1	NLBKW
Pictograph Set f. luminaires Design KW left, right, straight	NLKW0103
High Cover for ceiling mounting of emerg. lamp KW, opaque	NLKWH
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001