


Emergency luminaire KW 4x1W ERT-LED 230V, ceiling mounting

with supervision - centrally switchable, suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m

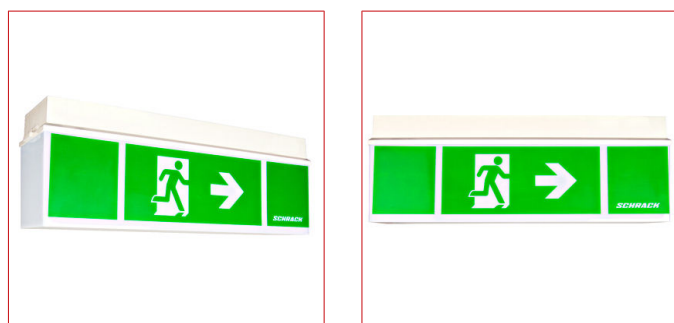


Technical Data

Net length (mm)	360,00
Net width (mm)	92,00
Net height (mm)	125,00
Net weight (kg)	0,70
Luminaire type	safety luminaire emergency sign luminaire Combined rescue path and rescue sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	Plastic luminaire
Design	KW
Halogen-free	Housing made of halogen-free plastic
Colour	White
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	16
Illuminant	ERT-LED (4W)
Lumen	520
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
IP Rating	IP54

Technical Data - continued

Mounting	surface mounting ceiling surface mounting wall universal
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

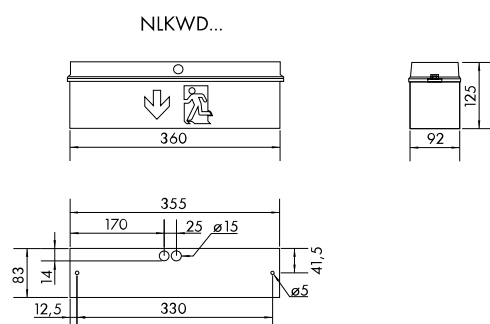

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	3,46	9,46	7,98	6,13	2,30
2,50	3,57	9,93	8,36	6,47	2,33
3,00	3,58	10,22	8,57	6,65	2,26
3,50	3,38	10,35	8,62	6,67	2,02
4,00	3,13	10,32	8,51	6,53	1,62

Article Table

DESCRIPTION	Order No.
Emergency luminaire KW 4x1W ERT-LED 230V, ceiling mounting with supervision - centrally switchable, suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m	NLKWD039EL
Optional Accessories	
Crystal-clear wall cover for KW	NLKCW
Ball protection gasket for KW and C1	NLBKW
Pictogram set for NLKWI.. left, right, up, down	NLKWIPIKTO
High Cover for ceiling mounting of emerg. lamp KW, opaque	NLKWH
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001