

Data Sheet for Article: NLKWD818--

Self-contained luminaire KW 8W 230V EVG ceiling mount.

suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m




Technical Data

Luminaire type	safety luminaire emergency sign luminaire Combined rescue path and rescue sign luminaire
Self contained - central battery	central power supply luminaire
Function	standard
Version	Plastic luminaire
Design	KW
Colour	White
Viewing distance (m)	16
Illuminant	T5 (8W)
Lumen	450
Voltage range (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP Rating	IP54

Technical Data - continued

Mounting	surface mounting ceiling
Net weight (kg)	0,70

Dimensions (mm)

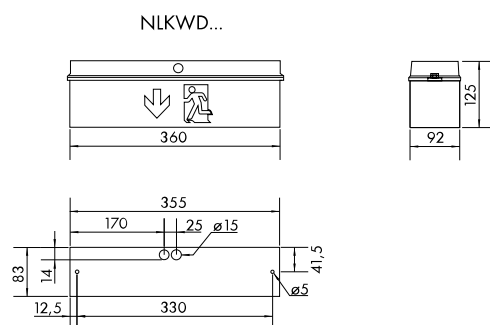

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	3,46	9,42	7,97	6,17	2,30
2,50	3,57	9,89	8,35	6,51	2,33
3,00	3,58	10,18	8,56	6,68	2,26
3,50	3,38	10,30	8,61	6,70	2,02
4,00	3,13	10,27	8,50	6,57	1,62

Article Table

DESCRIPTION	Order No.
Self-contained luminaire KW 8W 230V EVG ceiling mount. suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m	NLKWD818
Optional Accessories	
Crystal-clear wall cover for KW	NLKWC
Ball protection gasket for KW	NLBKW
Pictograph Set f. luminaires Design KW left, right, straight	NLKW0103
High Cover for ceiling mounting of emerg. lamp KW, opaque	NLKWH
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001