

Data Sheet for Article: NLKWD833SC

Self-contained luminaire KW self-contr.8W/3h 230V ceiling m.

suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m



Technical Data


Luminaire type	safety luminaire emergency sign luminaire Combined rescue path and rescue sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	KW
Halogen-free	Housing made of halogen-free plastic
Colour	White
Viewing distance (m)	16
Backup time (h)	3
Illuminant	T5 (8W)
Lumen	180

Technical Data - continued

Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	4,8/2,4 NiMh
IP Rating	IP54
Mounting	surface mounting ceiling
AA Class E 8101	AA5
Net weight (kg)	0,70

Dimensions (mm)

NLKWD...

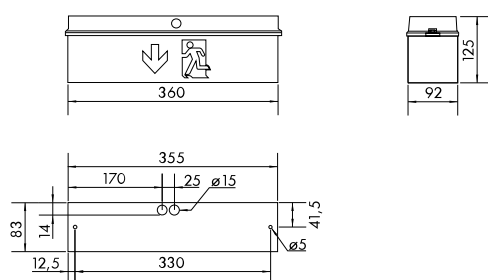

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 3h autonomy time

Montagehöhe [m]					
2,00	2,75	7,60	6,41	5,00	1,74
2,50	2,68	7,82	6,56	5,11	1,62
3,00	2,43	7,83	6,49	5,02	1,27
3,50	1,86	7,64	6,21	4,72	0,43
4,00	0,00	5,81	3,78	3,92	0,00

Article Table

DESCRIPTION	Order No.
Self-contained luminaire KW self-contr.8W/3h 230V ceiling m. suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m	NLKWD833SC
Optional Accessories	
Crystal-clear wall cover for KW	NLKWC
Ball protection gascet for KW	NLBKW
Pictograph Set f. luminaires Design KW left, right, straight	NLKW0103
High Cover for ceiling mounting of emerg. lamp KW, opaque	NLKWH
Accu NiMH 4,8V 2,4Ah for self cont.luminaires 8W 3h NLxxx833	NLAKKU4824
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001