


Emergency luminaire KWI Wireless 4x1W ERT-LED 8h 230V wall

With exchangeable lenses, corridor lenses in scope of delivery included, LiFePO₄, wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, 245lm, WirelessControl Professional type




Technical Data

Net length (mm)	390,00
Net width (mm)	93,00
Net height (mm)	99,00
Net weight (kg)	1,30
Luminaire type	safety luminaire emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	Plastic luminaire
Design	KWI
Halogen-free	Housing made of halogen-free plastic
Colour	White

Technical Data - continued

Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	16
Backup time (h)	8
Illuminant	ERT-LED (4W)
Lumen	245
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	2x 3,2V/3,3Ah LiFePO4
IP Rating	IP65
Impact Resistance	IK06
Mounting	surface mounting ceiling surface mounting wall
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

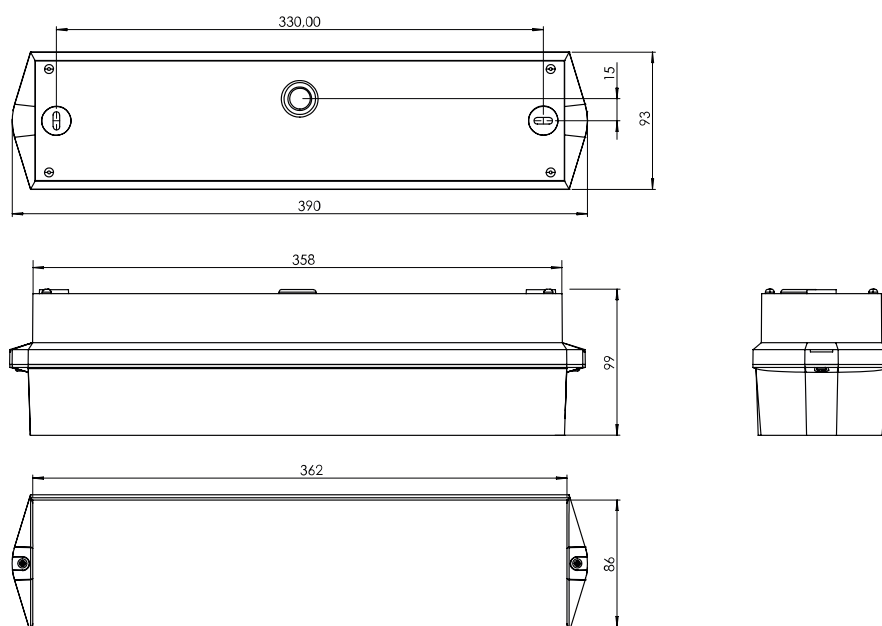

Article Table

DESCRIPTION	Order No.
Emergency luminaire KWI Wireless 4x1W ERT-LED 8h 230V wall	
With exchangeable lenses, corridor lenses in scope of delivery included, LiFePO4, wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, 245lm, WirelessControl Professional type	NLKWIW438W
Optional Accessories	
Ball protection gasket for KW and C1	NLBKW
Pictogram set for NLKWI.. left, right, up, down	NLKWIPIKTO
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK	NLAKKU323L
LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries	
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV