


Emergency luminaire KWI 4x1W ERT-LED 24V CC24, wall mounting

with supervision - centrally switchable, wall surface mounting with pictogram on one side or ceiling surface mounting without pictogram with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 520lm




Technical Data

Net length (mm)	390,00
Net width (mm)	93,00
Net height (mm)	99,00
Net weight (kg)	0,70
Luminaire type	safety luminaire emergency sign luminaire Combined rescue path and rescue sign luminaire
Self contained - central battery	Central power supply luminaire
Function	24V Core24 with supervision- centrally switchable
Version	Plastic luminaire
Design	KWI
Halogen-free	Housing made of halogen-free plastic

Technical Data - continued

Colour	White
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	16
Illuminant	ERT-LED (4W)
Lumen	520
Voltage range (V)	24V AC
IP Rating	IP65
Impact Resistance	IK06
Mounting	surface mounting ceiling surface mounting wall
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA3 AA4 AA5
Manufacturer	Schrack

Dimensions (mm)

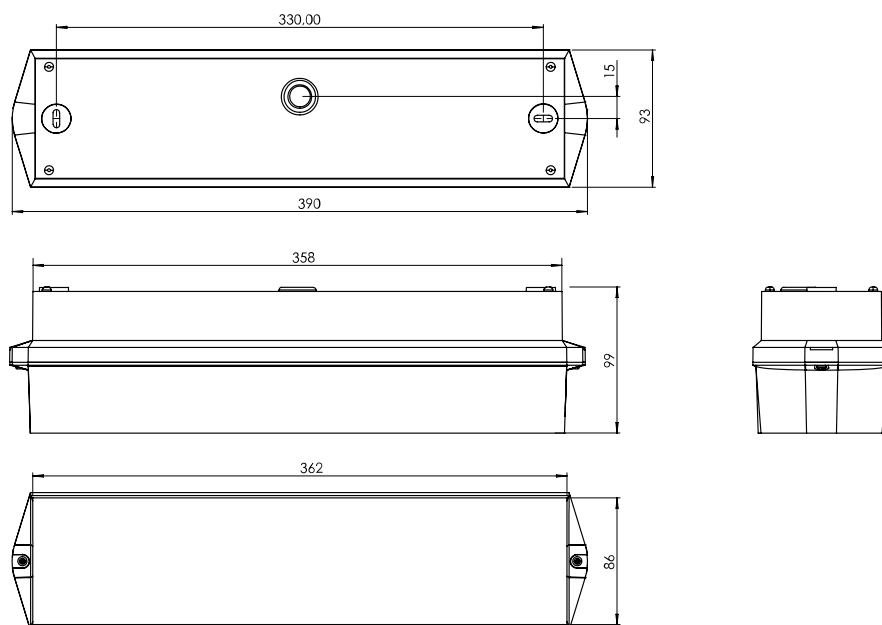

Article Table

DESCRIPTION	Order No.
Emergency luminaire KWI 4x1W ERT-LED 24V CC24, wall mounting with supervision - centrally switchable, wall surface mounting with pictogram on one side or ceiling surface mounting without pictogram with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 520lm	NLKWIW539C
Optional Accessories	
Ball protection gascet for KW and C1	NLBKW
Pictogram set for NLKWI.. left, right, up, down	NLKWIPIKTO
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001