



suitable for wall mounting with pictogram on one side, viewing distance: 16m

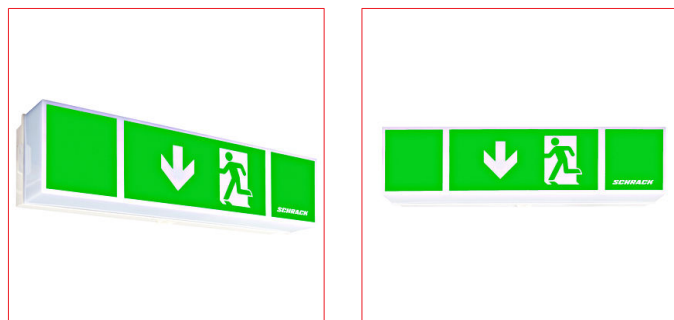

|                                  |                                      |
|----------------------------------|--------------------------------------|
| Net length (mm)                  | 360,00                               |
| Net width (mm)                   | 92,00                                |
| Net height (mm)                  | 85,00                                |
| Net weight (kg)                  | 0,95                                 |
| Luminaire type                   | emergency sign luminaire             |
| Self contained - central battery | Self contained luminaire             |
| Function                         | WirelessControl Professional         |
| Version                          | Plastic luminaire                    |
| Design                           | KW                                   |
| Halogen-free                     | Housing made of halogen-free plastic |
| Colour                           | White                                |
| Viewing distance (m)             | 16                                   |
| Backup time (h)                  | 8                                    |
| Illuminant                       | HP-LED (3W)                          |
| Lumen                            | 45                                   |
| Voltage range (V)                | 230V AC 50Hz ±20%                    |
| Battery (V/Ah)                   | 12/0,8 NiMh                          |
| IP Rating                        | IP54                                 |
| Mounting                         | surface mounting wall                |
| AA Class E 8101                  | AA4                                  |
| Manufacturer                     | Schrack                              |

## Dimensions (mm)

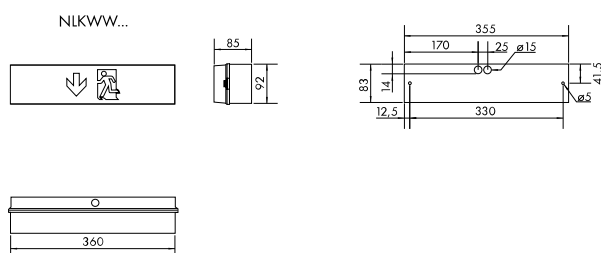

## Article Table

| DESCRIPTION                                                                                                                      | Order No.  |
|----------------------------------------------------------------------------------------------------------------------------------|------------|
| Emerg. luminaire KW Wireless LED 8h 230V AC w.m.<br>suitable for wall mounting with pictogram on one side, viewing distance: 16m | NLKWW008WL |
| <b>Optional Accessories</b>                                                                                                      |            |
| Crystal-clear wall cover for KW                                                                                                  | NLKCW      |
| Ball protection gasket for KW                                                                                                    | NLBKW      |
| Pictograph Set f. luminaires Design KW left, right, straight                                                                     | NLKW0103   |
| Flat cover for emergency luminaire Design KW, opaque                                                                             | NLKWN      |
| Accu NiMH 12V 0,8Ah f.luminaires BusControl, WirelessControl                                                                     | NLAKKU1208 |