


Emergency luminaire KW LED 230V wall mounting


suitable for wall mounting with pictogram on one side, viewing distance: 16m



Technical Data

Net length (mm)	360,00
Net width (mm)	92,00
Net height (mm)	85,00
Net weight (kg)	0,70
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	standard
Version	Plastic luminaire
Design	KW
Halogen-free	Housing made of halogen-free plastic
Colour	White
Viewing distance (m)	16
Illuminant	HP-LED (3W)
Lumen	300
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
IP Rating	IP54
Mounting	surface mounting wall
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

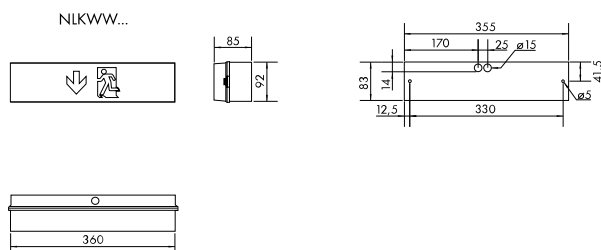

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,75	7,27	6,93	6,57	2,56
2,50	2,88	7,73	7,39	7,04	2,59
3,00	2,80	8,03	7,69	7,35	2,61
3,50	2,73	8,19	7,85	7,51	2,54
4,00	2,50	8,21	7,88	7,55	2,31

Article Table

DESCRIPTION	Order No.
Emergency luminaire KW LED 230V wall mounting suitable for wall mounting with pictogram on one side, viewing distance: 16m	NLKWW009
Optional Accessories	
Crystal-clear wall cover for KW	NLKWC
Ball protection gasket for KW	NLBKW
Pictograph Set f. luminaires Design KW left, right, straight	NLKW0103
Flat cover for emergency luminaire Design KW, opaque	NLKWN