


Emergency luminaire KW 6x0,5W LED 230V, wall mounting

with supervision - centrally switchable, suitable for wall mounting with pictogram on one side, viewing distance: 16m

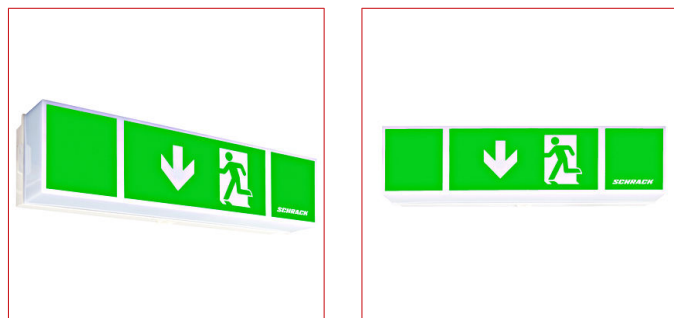


Technical Data

Net length (mm)	360,00
Net width (mm)	92,00
Net height (mm)	85,00
Net weight (kg)	0,70
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	Plastic luminaire
Design	KW
Halogen-free	Housing made of halogen-free plastic
Colour	White
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	16
Illuminant	LED (3W)
Lumen	300
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
IP Rating	IP54
Mounting	surface mounting wall
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40

Technical Data - continued

AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

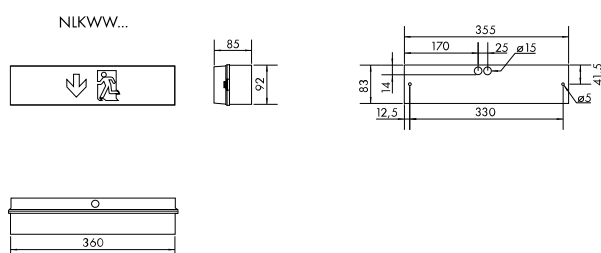

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,75	7,27	6,93	6,57	2,56
2,50	2,88	7,73	7,39	7,04	2,59
3,00	2,80	8,03	7,69	7,35	2,61
3,50	2,73	8,19	7,85	7,51	2,54
4,00	2,50	8,21	7,88	7,55	2,31

Article Table

DESCRIPTION	Order No.
Emergency luminaire KW 6x0,5W LED 230V, wall mounting with supervision - centrally switchable, suitable for wall mounting with pictogram on one side, viewing distance: 16m	NLKWW009EL
Optional Accessories	
Crystal-clear wall cover for KW	NLKWC
Ball protection gasket for KW and C1	NLBKW
Pictogram set for NLKWI.. left, right, up, down	NLKWIPIKTO
Flat cover for emergency luminaire Design KW, opaque	NLKWN