

Data Sheet for Article: NLKWW4035C

Emergency luminaire KW Autotest LED 3h 230V AC wall mount

1h/3h/8h adjustable, wall surface mounting with pictogram on one side, viewing distance:
16m, IP54, protection class II, with LiFePO4 battery, 1h: 300lm; 3h: 300lm; 8h: 120lm




Technical Data

Net length (mm)	390,00
Net width (mm)	93,00
Net height (mm)	99,00
Net weight (kg)	0,80
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	KW
Halogen-free	Housing made of halogen-free plastic
Colour	White
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010

Technical Data - continued

Viewing distance (m)	16
Backup time (h)	3
Illuminant	LED (3W)
Lumen	1h: 300;3h: 300;8h: 120
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	2x 3,2V/1,6Ah LiFePO4
IP Rating	IP54
Mounting	surface mounting wall
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensioned drawing: Emergency luminaire KW Autotest LED 3h 230V AC wall mount

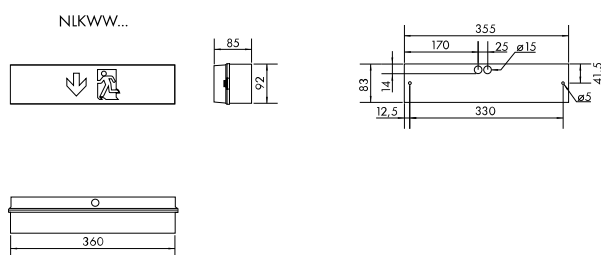

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,31	8,48	7,84	7,17	2,84
2,50	3,46	9,07	8,42	7,75	2,99
3,00	3,52	9,49	8,84	8,17	3,06
3,50	3,51	9,78	9,12	8,46	3,05
4,00	3,41	9,94	9,28	8,62	2,95
5,00	2,90	9,90	9,26	8,60	2,46
6,00	1,60	9,40	8,76	8,14	1,24

Article Table

DESCRIPTION	Order No.
Emergency luminaire KW Autotest LED 3h 230V AC wall mount 1h/3h/8h adjustable, wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 300lm; 3h: 300lm; 8h: 120lm	NLKWW403SC
Optional Accessories	
Ball protection gasket for KW and C1	NLBKW
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK LiFePO4 - Lithium-iron phosphate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU323L