


Self-contained luminaire KW 8W 230V EVG wall mounting

suitable for wall mounting with pictogram on one side, viewing distance: 16m




Technical Data

Luminaire type	safety luminaire emergency sign luminaire Combined rescue path and rescue sign luminaire
Self contained - central battery	central power supply luminaire
Function	standard
Version	Plastic luminaire
Design	KW
Colour	White
Viewing distance (m)	16
Illuminant	T5 (8W)
Lumen	450
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
IP Rating	IP54
Mounting	surface mounting wall

Technical Data - continued

Net weight (kg) | 0,70

Dimensions (mm)

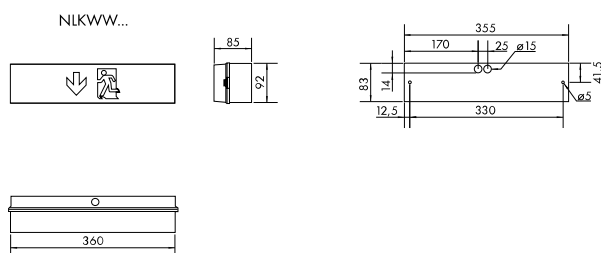

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	3,61	9,28	8,37	7,38	2,86
2,50	3,71	9,90	8,97	7,98	3,09
3,00	3,84	10,35	9,41	8,42	3,11
3,50	3,75	10,67	9,72	8,73	3,15
4,00	3,73	10,86	9,90	8,91	3,01

Article Table

DESCRIPTION	Order No.
Self-contained luminaire KW 8W 230V EVG wall mounting suitable for wall mounting with pictogram on one side, viewing distance: 16m	NLKWW818
Optional Accessories	
Crystal-clear wall cover for KW	NLKCW
Ball protection gasket for KW	NLBKW
Pictograph Set f. luminaires Design KW left, right, straight	NLKW0103
Flat cover for emergency luminaire Design KW, opaque	NLKWN