

Data Sheet for Article: NLKXU009EL

Emergency luminaire KX 6x0,5W LED 230V, universal mounting

with supervision - centrally switchable; viewing distance: 30m, 300lm




Technical Data

Net length (mm)	332,00
Net width (mm)	48,00
Net height (mm)	242,00
Net weight (kg)	0,80
Luminaire type	safety luminaire emergency sign luminaire Combined rescue path and rescue sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	Plastic luminaire edge luminaire
Design	KX
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Viewing distance (m)	30
Illuminant	LED (3W)
Lumen	300
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1,10


Technical Data - continued

Power max. (W)	5,20
IP Rating	IP40
Impact Resistance	≥ IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

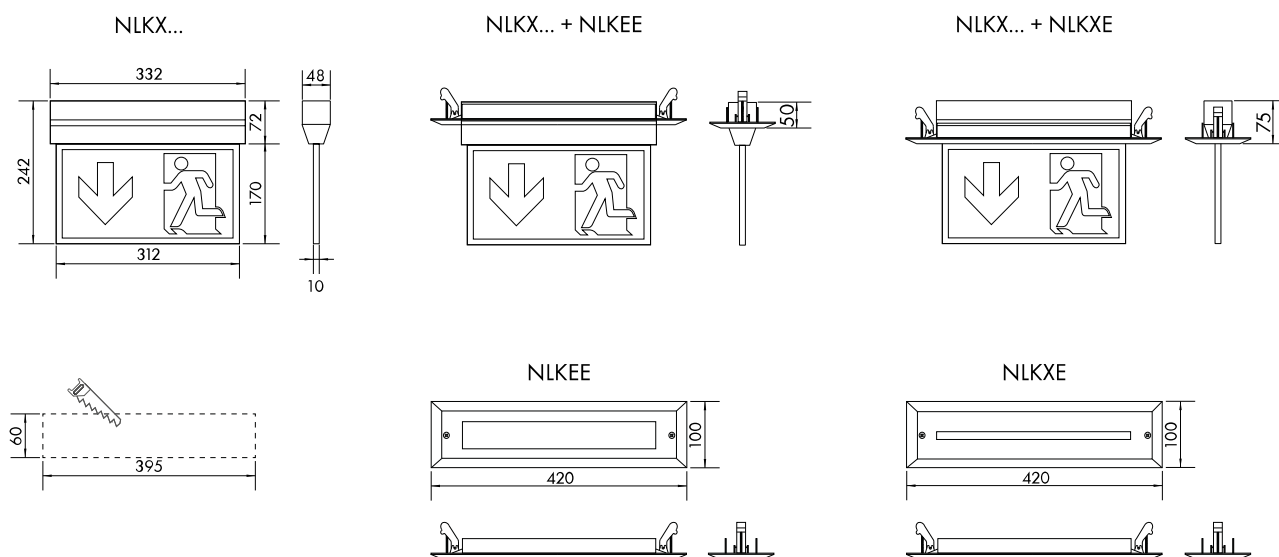

Drilling distances (mm)

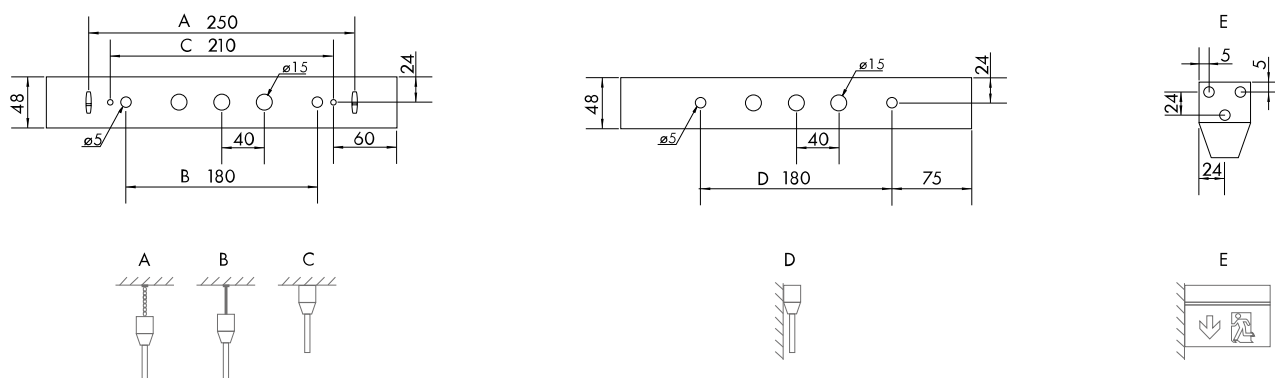

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,96	9,88	7,48	5,1	1,93
2,50	4,25	10,76	8,05	5,39	1,88
3,00	4,41	11,47	8,46	5,47	1,64
3,50	4,38	12,06	8,7	5,34	1,12

Article Table

DESCRIPTION	Order No.
Emergency luminaire KX 6x0,5W LED 230V, universal mounting with supervision - centrally switchable; viewing distance: 30m, 300lm	NLKXU009EL
Optional Accessories	
Concrete Plaster Box for Emergency luminaires Design KX	NLKXBE
Recessed Frame for KX with small cut-out Required ceiling cut out: 395 x 60 mm	NLKXE
Recessed Frame for KE und KX-opal, large cut-out Required ceiling cut out: 395 x 60 mm	NLKEE
Design-pendant pair 500 mm white, prewired	NL2DW
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Ball Protection for KC, KB+KBG, KX, PF, LX, C2 l x h x d: 450 x 280 x 125mm	NLBALL2
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4