

# Emergency luminaire Linda Industry 24W LED


mixed mode, single lamp supervision, 230V AC/DC, universal mounting, 3802lm, IP65, 4000K, l=1270, suitable for installation in food-production/processing environments (HACCP, IFS, BRC Standard)., 3800lm



## Technical Data

|                                  |                                                                                                |
|----------------------------------|------------------------------------------------------------------------------------------------|
| Net length (mm)                  | 1.270,00                                                                                       |
| Net width (mm)                   | 100,00                                                                                         |
| Net height (mm)                  | 100,00                                                                                         |
| Net weight (kg)                  | 2,30                                                                                           |
| Luminaire type                   | safety luminaire<br>emergency sign luminaire<br>Combined rescue path and rescue sign luminaire |
| Self contained - central battery | Central power supply luminaire                                                                 |
| Function                         | with monitoring and mixing operation                                                           |
| Version                          | Plastic luminaire                                                                              |
| Design                           | LIU                                                                                            |
| Colour                           | RAL 7035 (grau)                                                                                |
| Illuminant                       | LED (24W)                                                                                      |
| Lumen                            | 3800                                                                                           |
| Voltage range (V)                | 230V AC 50Hz ±20%; 230V DC ±20%                                                                |
| IP Rating                        | IP65                                                                                           |
| Impact Resistance                | IK10                                                                                           |
| Mounting                         | surface mounting ceiling<br>surface mounting wall<br>universal                                 |
| Min. ambient temperature (°C)    | -20                                                                                            |
| Max. ambient temperature (°C)    | 35                                                                                             |

## Dimensions (mm)

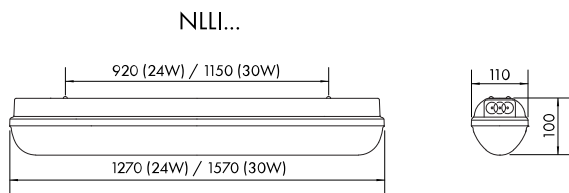

## Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

|  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 2,00                                                                              | 4,79                                                                              | 11,64                                                                             | 11,2                                                                              | 11,14                                                                               | 4,53                                                                                |
| 2,50                                                                              | 5,97                                                                              | 14,48                                                                             | 13,91                                                                             | 13,77                                                                               | 5,59                                                                                |
| 3,00                                                                              | 7,14                                                                              | 17,33                                                                             | 16,63                                                                             | 16,44                                                                               | 6,67                                                                                |
| 3,50                                                                              | 8,31                                                                              | 20,14                                                                             | 19,32                                                                             | 19,07                                                                               | 7,73                                                                                |
| 4,00                                                                              | 9,48                                                                              | 22,98                                                                             | 22,04                                                                             | 21,76                                                                               | 8,82                                                                                |
| 5,00                                                                              | 11,11                                                                             | 27,14                                                                             | 25,95                                                                             | 24,51                                                                               | 9,86                                                                                |
| 6,00                                                                              | 12,08                                                                             | 29,37                                                                             | 27,95                                                                             | 26,27                                                                               | 10,47                                                                               |
| 7,00                                                                              | 12,99                                                                             | 31,32                                                                             | 29,66                                                                             | 27,74                                                                               | 10,95                                                                               |
| 8,00                                                                              | 13,75                                                                             | 33,24                                                                             | 31,16                                                                             | 29,02                                                                               | 11,35                                                                               |
| 9,00                                                                              | 14,09                                                                             | 35,18                                                                             | 32,66                                                                             | 30,12                                                                               | 11,66                                                                               |
| 10,00                                                                             | 14,33                                                                             | 36,93                                                                             | 34                                                                                | 31,07                                                                               | 11,9                                                                                |
| 12,00                                                                             | 15,54                                                                             | 39,41                                                                             | 36,01                                                                             | 32,57                                                                               | 12,2                                                                                |
| 14,00                                                                             | 16,39                                                                             | 40,51                                                                             | 37,11                                                                             | 33,6                                                                                | 12,18                                                                               |
| 16,00                                                                             | 15,98                                                                             | 42,87                                                                             | 38,66                                                                             | 34,32                                                                               | 11,98                                                                               |

## Article Table

| DESCRIPTION                                                                                                                                                                                                                                                            | Order No.  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire Linda Industry 24W LED<br>mixed mode, single lamp supervision, 230V AC/DC, universal mounting, 3802lm, IP65, 4000K, l=1270, suitable for installation in NLLIU024ML<br>food-production/processing environments (HACCP, IFS, BRC Standard)., 3800lm |            |
| <b>Optional Accessories</b>                                                                                                                                                                                                                                            |            |
| LINDA wall mounting set 90° for 18/36/58W                                                                                                                                                                                                                              | LI2JLT0452 |
| LINDA mounting hook set, stainless steel for 18/36/58W                                                                                                                                                                                                                 | LI2JLT0463 |