

Emergency luminaire Linda Industry 30W LED


mixed mode, single lamp supervision, 230V AC/DC, universal mounting, 4758lm, IP65, 4000K, l=1570, suitable for installation in food-production/processing environments (HACCP, IFS, BRC Standard)., 4760lm



Technical Data

Net length (mm)	1.570,00
Net width (mm)	100,00
Net height (mm)	110,00
Net weight (kg)	2,80
Luminaire type	safety luminaire emergency sign luminaire Combined rescue path and rescue sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring and mixing operation
Version	Plastic luminaire
Design	LIU
Colour	RAL 7035 (grau)
Illuminant	LED (30W)
Lumen	4760
Voltage range (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP Rating	IP65
Impact Resistance	IK10
Mounting	surface mounting ceiling surface mounting wall universal
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	35

Dimensions (mm)

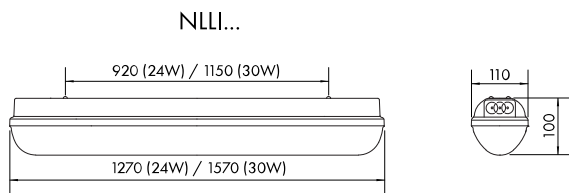

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	4,83	11,72	11,31	11,3	4,61
2,50	5,99	14,54	13,99	13,91	5,66
3,00	7,17	17,39	16,71	16,54	6,72
3,50	8,34	20,23	19,43	19,21	7,79
4,00	9,5	23,05	22,11	21,83	8,85
5,00	11,86	28,72	27,54	26,24	10,6
6,00	12,79	31,32	29,9	28,18	11,3
7,00	13,79	33,45	31,79	29,86	11,87
8,00	14,68	35,36	33,45	31,27	12,33
9,00	15,41	37,3	34,94	32,53	12,71
10,00	15,74	39,23	36,44	33,63	13,03
12,00	16,54	42,62	39,02	35,43	13,47
14,00	17,69	44,47	40,65	36,78	13,68
16,00	18,29	45,56	41,66	37,73	13,59

Article Table

DESCRIPTION	Order No.
Emergency luminaire Linda Industry 30W LED mixed mode, single lamp supervision, 230V AC/DC, universal mounting, 4758lm, IP65, 4000K, l=1570, suitable for installation in NLLIU030ML food-production/processing environments (HACCP, IFS, BRC Standard)., 4760lm	
Optional Accessories	
LINDA wall mounting set 90° for 18/36/58W	LI2JLT0452
LINDA mounting hook set, stainless steel for 18/36/58W	LI2JLT0463