


Data Sheet for Article: NLLMW403WL

Emergency luminaire LM WL 6x0,5W LED 3h 230VAC wall mounting

Wall surface mounting, 3h autonomy time, viewing distance: 22m, LiFePO₄ battery, radio switchable, WirelessControl Professional type

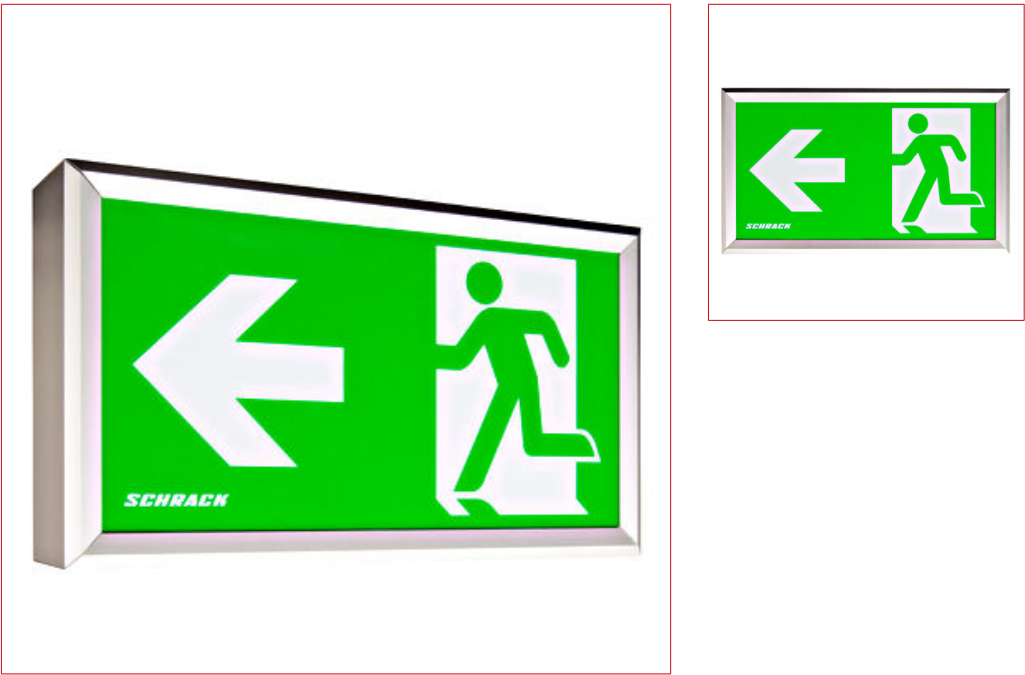

Technical Data


Net length (mm)	258,00
Net width (mm)	62,00
Net height (mm)	147,00
Net weight (kg)	1,10
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	Aluminium profile luminaire
Design	LM
Colour	Silver
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	22

Technical Data - continued

Backup time (h)	3
Illuminant	LED (3W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,50
Power non-maintained mode (W)	0,80
Power max. (W)	4,70
Battery (V/Ah)	3,2/1,2 LiFePO4
IP Rating	IP40
Impact Resistance	IK03
Mounting	surface mounting wall
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack


Dimensions (mm)

NLLMW...

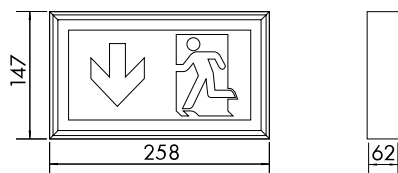

Drilling distances (mm)

NLLMW...

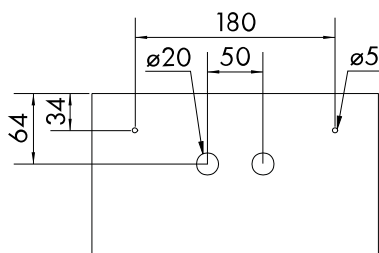

Article Table

DESCRIPTION	Order No.
Emergency luminaire LM WL 6x0,5W LED 3h 230VAC wall mounting Wall surface mounting, 3h autonomy time, viewing distance: 22m, LiFePO4 battery, radio switchable, WirelessControl Professional type	NLLMW403WL
Optional Accessories	
Ball Protection for KD, KM, KS, LM, VM, RI, RM l x h x d: 320 x 220 x 120mm	NLBALL1
Set 2 accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO LiFePO4 - Lithium-iron phosphate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU321L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV