

# Emergency luminaire OM OLED 230V AC/DC ML one sided ceiling


Incl. standard pictogram set, with integrated adjustable ceiling short pendant, convertible to wall bracket mounting, with single luminaire supervision and mixed operation; viewing distance: 20m



## Technical Data

|                                  |                                              |
|----------------------------------|----------------------------------------------|
| Net length (mm)                  | 222,00                                       |
| Net height (mm)                  | 127,00                                       |
| Netto depth (mm)                 | 40,00                                        |
| Net weight (kg)                  | 0,20                                         |
| Luminaire type                   | emergency sign luminaire                     |
| Self contained - central battery | Central power supply luminaire               |
| Function                         | with monitoring - centrally switchable       |
| Version                          | edge luminaire                               |
| Design                           | OM                                           |
| Halogen-free                     | Housing made of halogen-free plastic         |
| Colour                           | Aluminum anodised                            |
| Viewing distance (m)             | 20                                           |
| Illuminant                       | OLED                                         |
| Voltage range (V)                | 230V AC 50Hz $\pm 20\%$ ; 230V DC $\pm 20\%$ |
| IP Rating                        | IP20                                         |
| Mounting                         | recessed mounting with pendant               |
| Min. ambient temperature (°C)    | 0                                            |
| Max. ambient temperature (°C)    | 40                                           |
| AA Class E 8101                  | AA5                                          |

## Dimensions (mm)

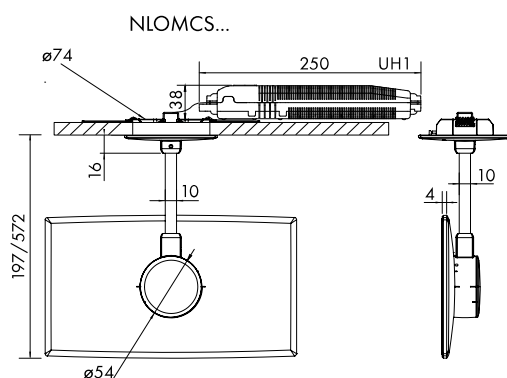

## Article Table

| DESCRIPTION                                                                                                                                                                                                                                                       | Order No.  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire OM OLED 230V AC/DC ML one sided ceiling<br>Incl. standard pictogram set, with integrated adjustable ceiling short pendant, convertible to wall bracket mounting, with single luminaire supervision and mixed operation; viewing distance: 20m | NLOMCS009M |
| <b>Optional Accessories</b>                                                                                                                                                                                                                                       |            |
| Pendant for Design OM, 500 mm aluminium, prewired<br>can be shortened according to requirements                                                                                                                                                                   | NLOM1PA    |