

Emergency luminaire OM OLED 230V AC/DC EL wall recess. mount

Incl. standard pictogram set, with supervision - centrally switchable; viewing distance: 20m




Technical Data

Net length (mm)	222,00
Net height (mm)	127,00
Netto depth (mm)	10,00
Net weight (kg)	0,12
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	edge luminaire
Design	OM
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 7035 (grau)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	20
Illuminant	OLED
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	4
Power non-maintained mode (W)	1, 10
Power max. (W)	4
IP Rating	IP20
Impact Resistance	$\geq$ IK03
Mounting	recessed wall mounting

Technical Data - continued

Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	40
AA Class E 8101	AA5
Manufacturer	Schrack

Dimensions (mm)

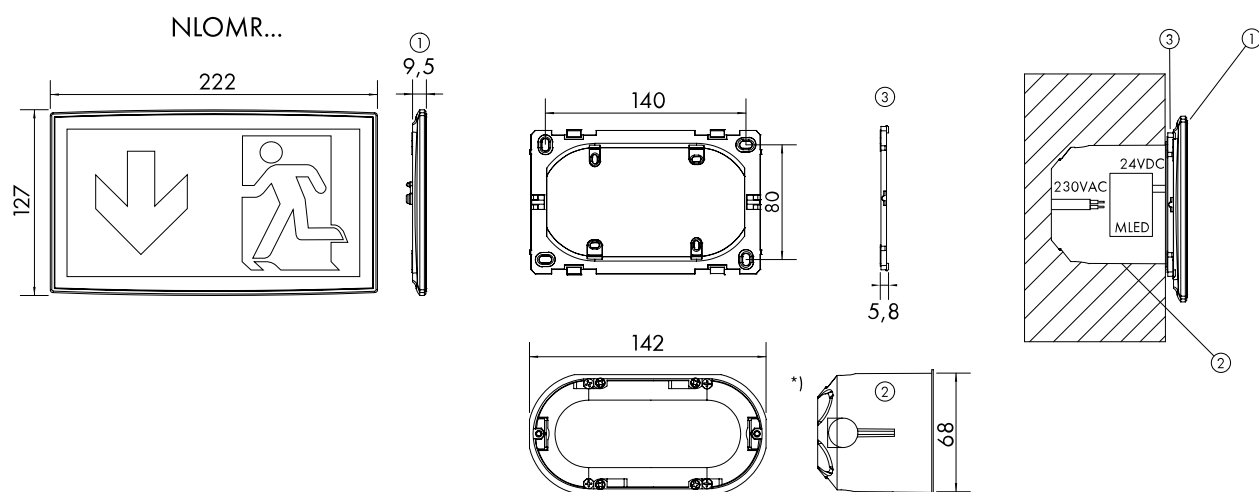

DESCRIPTION	Order No.
Emergency luminaire OM OLED 230V AC/DC EL wall recess. mount	NLOMRS009E
Incl. standard pictogram set, with supervision - centrally switchable; viewing distance: 20m	