

Data Sheet for Article: NLPMD003SC

Emergency luminaire PM Autotest LED 3h 230V AC ceiling mount

1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides, viewing distance: 20m, IP65, protection class II




Technical Data

Net length (mm)	236,00
Net width (mm)	136,00
Net height (mm)	168,00
Net weight (kg)	1,30
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	PM
Halogen-free	Housing made of halogen-free plastic
Colour	White
Pictogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010

Technical Data - continued

Viewing distance (m)	20
Backup time (h)	3
Illuminant	LED (3W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	9,6/2,0 NiMH
IP Rating	IP65
Impact Resistance	IK3
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Abmessungen (mm)

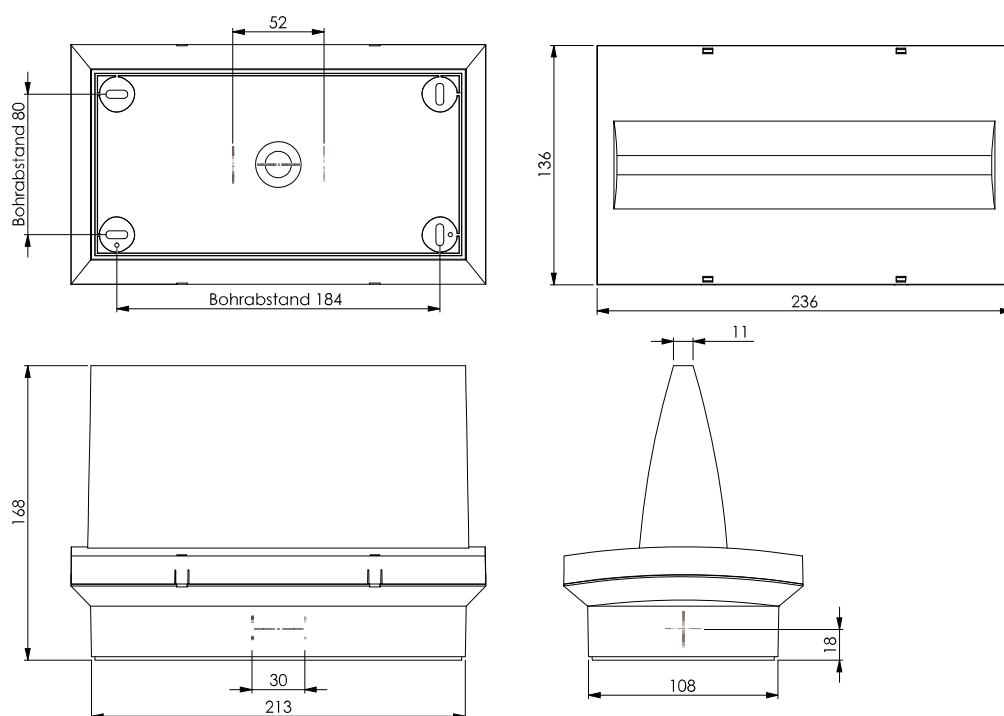

Article Table

DESCRIPTION	Order No.
Emergency luminaire PM Autotest LED 3h 230V AC ceiling mount 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides, viewing distance: 20m, IP65, protection class NLPMD003SC II	
Optional Accessories	
Recessed frame white for emergency luminaires design PM Required ceiling cut out: 246 x 152 mm	NLPME
Accu NiMH 4,8V 2,0Ah for self contained luminaires LED LPU or LEM module	NLAKKU4820