

Emergency luminaire PM 4x1W ERT-LED

230V, ceiling mounting

Combined luminaire for marking and illuminating escape routes, with exchangeable lenses, corridor lenses in scope of delivery included, with supervision - centrally switchable, ceiling surface mounting, IP65, protection class II, 335lm




Technical Data

Net length (mm)	236,00
Net width (mm)	136,00
Net height (mm)	168,00
Net weight (kg)	0,89
Luminaire type	safety luminaire emergency sign luminaire Combined rescue path and rescue sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	Plastic luminaire
Design	PM
Halogen-free	Housing made of halogen-free plastic

Technical Data - continued

Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Viewing distance (m)	20
Illuminant	ERT-LED (4W)
Lumen	335
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1,10
Power max. (W)	5,20
IP Rating	IP65
Impact Resistance	IK06
Mounting	surface mounting ceiling recessed mounting ceiling optional
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA3 AA4 AA5
Manufacturer	Schrack

Dimensions (mm)

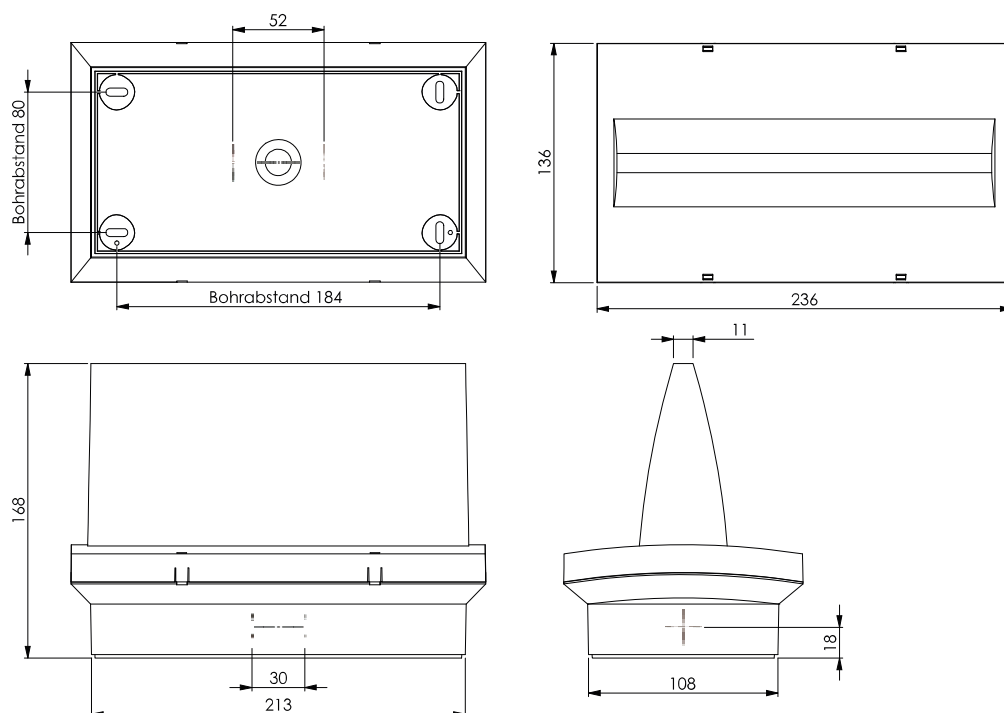

Spacing table with corridor lenses (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	5,8	13,26	10,58	7,88	3,04
2,50	6,54	15,39	11,93	8,47	3,23
3,00	6,94	17,3	13,12	8,92	3,39
3,50	6,94	18,85	13,95	9,29	3,5
4,00	5,02	19,73	14,24	9,56	3,56
5,00	3,76	18,43	11,99	9,99	3,58
6,00	2,05	13,71	10,88	10,16	3,5
7,00	1,68	10,99	9,01	10,2	3,22
8,00	1,46	6,75	8,13	10,1	1,97

Article Table

DESCRIPTION	Order No.
Emergency luminaire PM 4x1W ERT-LED 230V, ceiling mounting	
Combined luminaire for marking and illuminating escape routes, with exchangeable lenses, corridor lenses in scope of delivery included, with supervision - centrally switchable, ceiling surface mounting, IP65, protection class II, 335lm	NLPMD039EL
Optional Accessories	
Recessed frame white for emergency luminaires design PM	
Required ceiling cut out: 246 x 152 mm	NLPME