

Emergency luminaire PM Autotest LED 3h 230V AC ceiling mount

1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides, viewing distance: 20m, IP65, protection class II, LiFePO4 battery




Technical Data

Net length (mm)	236,00
Net width (mm)	136,00
Net height (mm)	168,00
Net weight (kg)	1,30
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	PM
Halogen-free	Housing made of halogen-free plastic
Colour	White
Pictogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010

Technical Data - continued

Viewing distance (m)	20
Backup time (h)	1/3/8
Illuminant	LED (3W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,30
Power non-maintained mode (W)	0,40
Power max. (W)	4,20
Battery (V/Ah)	2x 3,2V/1,6Ah LiFePO4
IP Rating	IP65
Impact Resistance	IK03
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Abmessungen (mm)

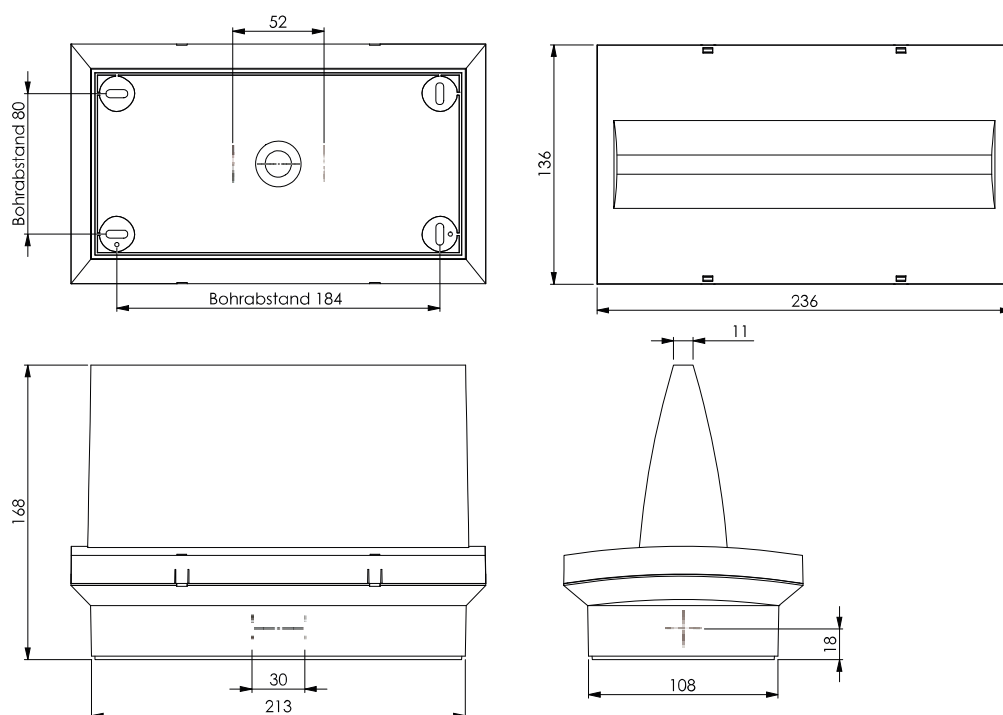

Article Table

DESCRIPTION	Order No.
Emergency luminaire PM Autotest LED 3h 230V AC ceiling mount 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides, viewing distance: 20m, IP65, protection class NLPMD403SC II, LiFePO4 battery	
Optional Accessories	
Recessed frame white for emergency luminaires design PM Required ceiling cut out: 246 x 152 mm	NLPME
Set 2 accus LiFePO4 3,2V 1,6Ah f. luminaires. w. LEO or LPK LiFePO4 - Lithium-iron phosphate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU3216
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV