

Emergency luminaire QAW LED 230V EL wall mounting

with supervision - centrally switchable, 2300lm



Technical Data


Net height (mm)	113,00
Net diameter (mm)	395,00
Net weight (kg)	0,90
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	metal luminaire
Design	QAW
Colour	Silver
Illuminant	LED (26W)
Lumen	2300
Voltage range (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	26
Power non-maintained mode (W)	1,20
Power max. (W)	26
IP Rating	IP20
Impact Resistance	≥ IK03
Mounting	surface mounting ceiling surface mounting wall universal
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40

Technical Data - continued

AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

NLQAW...

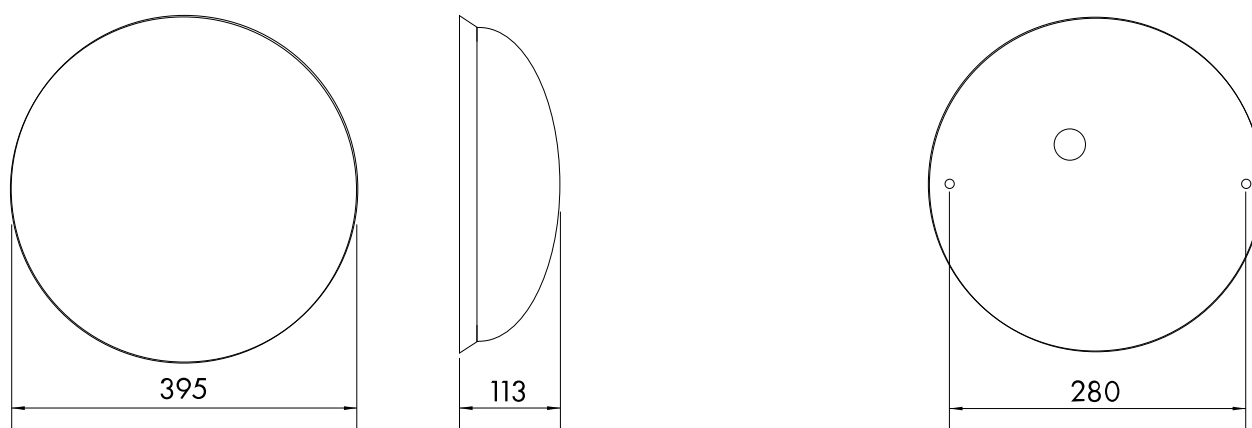

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	4,66	11,58	11,6	11,62	4,67
2,50	5,83	14,47	14,5	14,52	5,84
3,00	7	17,37	17,4	17,43	7
3,50	7,94	19,74	19,76	19,79	7,94
4,00	8,33	20,77	20,79	20,81	8,32
5,00	8,98	22,57	22,57	22,58	8,97
6,00	9,49	24,07	24,06	24,06	9,47
7,00	9,89	25,34	25,32	25,31	9,86
8,00	10,18	26,41	26,39	26,36	10,14
9,00	10,37	27,31	27,28	27,25	10,34
10,00	10,47	28,05	28,01	27,97	10,44
12,00	10,41	29,11	29,06	29,01	10,37
14,00	9,96	29,62	29,58	29,53	9,93
16,00	9,06	29,63	29,58	29,53	9,03

DESCRIPTION	Order No.
Emergency luminaire QAW LED 230V EL wall mounting with supervision - centrally switchable, 2300lm	NLQAW009EL