

Emerg. luminaire QAW Wireless LED 8h 230V AC wall

central switching



Technical Data

Net height (mm)	113,00
Net diameter (mm)	395,00
Net weight (kg)	0,90
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	metal luminaire
Design	QAW
Colour	Silver
Backup time (h)	8
Illuminant	Net: HP-LED (26W) Emergency: HP-LED (3W)
Lumen	110
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	4,8/2,0 NiMh
IP Rating	IP20
Mounting	surface mounting ceiling surface mounting wall universal
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4



Technical Data - continued

Manufacturer

Schrack

Dimensions (mm)

NLQAW...

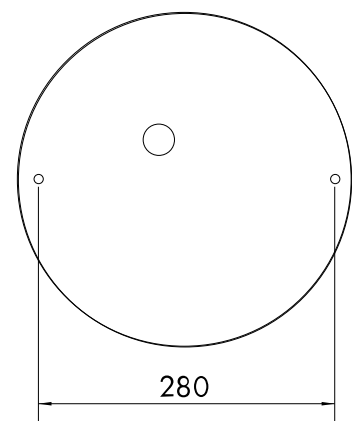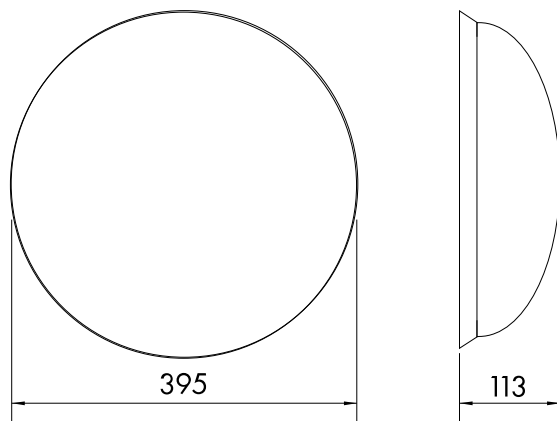

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2	2,14	5,74	5,75	5,76	2,14
2,5	2,10	6,02	6,03	6,04	2,10
3	1,95	6,12	6,13	6,14	1,95
3,5	1,63	6,04	6,06	6,07	1,63
4	1,00	5,79	5,81	5,83	1,00

Article Table

DESCRIPTION	Order No.
Emerg. luminaire QAW Wireless LED 8h 230V AC wall central switching	NLQAW028WL
Optional Accessories	
Accu NiMH 4,8V 2,0Ah for self contained luminaires LED LPU or LEM module	NLAKKU4820