

Data Sheet for Article: NLS1D003SC

Self-contained luminaire S1 self-control LED

3h 230V AC


Ceiling surface mounting; viewing distance: 27m




Technical Data

Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	edge luminaire
Design	S1
Colour	Aluminum brushed
Viewing distance (m)	27
Backup time (h)	3
Illuminant	HP-LED (3W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	4,8/0,8 NiMh
IP Rating	IP40
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Net weight (kg)	1,13

Dimensions (mm)

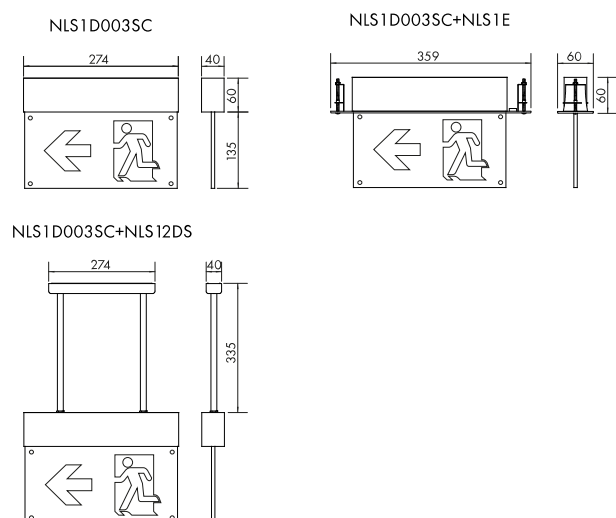

Drilling distances (mm)

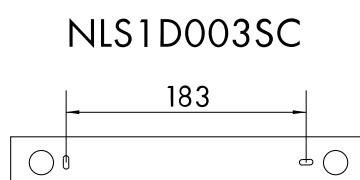

Article Table

DESCRIPTION	Order No.
Self-contained luminaire S1 self-control LED 3h 230V AC	NLS1D003SC
Ceiling surface mounting; viewing distance: 27m	
Optional Accessories	
Accu NiMH 4,8V 0,8 Ah for emergency luminaires	NLAKKU4808
Suitable for NLK1U003SC, NLK2U003SC, NLK3U003SC, NLS1W003SC, NLS1D003SC	