

Data Sheet for Article: NLSKS21035

Emergency floodlight SKS 2x10W LED 3h 230V AC

Self contained luminaire type with autotest, 12V/9Ah, 1800lm



Technical Data


Net width (mm)	300,00
Net height (mm)	300,00
Netto depth (mm)	210,00
Net weight (kg)	9,55
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	emergency floodlight
Design	SKS/SGS
Colour	RAL 7035 (grau)
Backup time (h)	3
Illuminant	LED
Lumen	1800
Voltage range (V)	230V AC 50Hz $\pm 20\%$

Technical Data - continued


Power non-maintained mode (W)	9,20
Power max. (W)	11,50
Battery (V/Ah)	12/9 OGiv
IP Rating	IP54
Impact Resistance	≥ IK03
Mounting	surface mounting wall
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

SGS 28Ah/40Ah

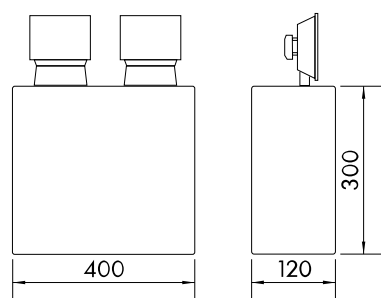

SKS 9Ah/17Ah



Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 3h

					
2,00	3,57	7,68	7,33	6,74	3,11
2,50	4,46	9,6	9,16	8,42	3,89
3,00	5,35	11,52	10,99	10,11	4,67
3,50	6,24	13,44	12,82	11,8	5,45
4,00	7	15,13	14,47	13,33	6,13
5,00	8,14	17,78	17,07	15,86	7,15
6,00	9,12	20,23	19,47	18,11	8,13
7,00	9,95	22,53	21,61	20,12	9
8,00	10,33	24,59	23,53	22,12	9,77
9,00	10,62	26,46	25,21	23,97	10,31
10,00	10,82	27,85	26,64	25,67	10,63
10,00	10,82	27,85	26,64	25,67	10,63
12,00	10,98	29,33	28,79	28,52	10,91
14,00	10,82	30,21	30,37	30,08	10,81
16,00	10,29	30,64	31,03	30,91	10,33

Article Table

DESCRIPTION	Order No.
Emergency floodlight SKS 2x10W LED 3h 230V AC Self contained luminaire type with autotest, 12V/9Ah, 1800lm	NLSKS2103S
Optional Accessories	
Battery RPower GiV high current 12V/9,0Ah (C20) Design life according to EUROBAT 5 years, suitable for UPS solutions, connection: terminal T2 6,3mm	NLBA009