


Data Sheet for Article: NLWAF539CC

Emergency lum. WAF white ERTLED 3x1W

24V CC24, wall mounting

Wall surface mounting, with supervision - centrally switchable, 420lm




Technical Data

Net length (mm)	193,00
Net height (mm)	115,00
Netto depth (mm)	53,00
Net weight (kg)	0,37
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	24V Core24 with supervision- centrally switchable
Version	metal luminaire
Design	WAF
Colour	White
Illuminant	ERT-LED (3W)
Lumen	420
Voltage range (V)	24V AC
Power maintained mode (W)	4,10

Technical Data - continued

Power non-maintained mode (W)	0,40
Power max. (W)	4,10
IP Rating	IP20
Impact Resistance	IK04
Mounting	surface mounting wall
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensioned drawing: Emergency lum. WAF white ERTLED 3x1W 24V CC24, wall mounting

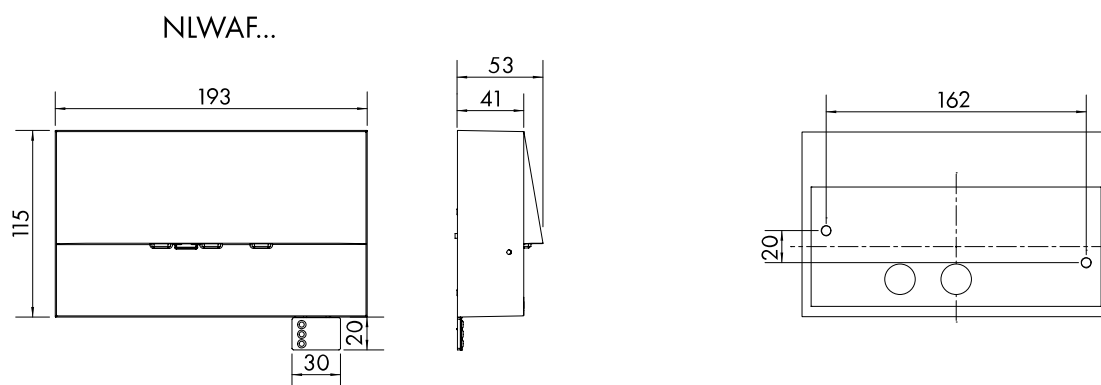

DESCRIPTION	Order No.
Emergency lum. WAF white ERTLED 3x1W 24V CC24, wall mounting	NLWAF539CC
Wall surface mounting, with supervision - centrally switchable, 420lm	