


Data Sheet for Article: NLWAF29EL

Emergency luminaire WAF anthrac. ERT-LED 3x1W 230V AC/DC EL

Wall surface mounting, with supervision - centrally switchable, 420lm



Technical Data


Net length (mm)	193,00
Net height (mm)	115,00
Netto depth (mm)	53,00
Net weight (kg)	0,37
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	metal luminaire
Design	WAF
Colour	RAL 7016 (anthracite)
Illuminant	ERT-LED (3W)
Lumen	420
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	4,50
Power non-maintained mode (W)	1,10
Power max. (W)	4,50
IP Rating	IP20
Impact Resistance	IK04
Mounting	surface mounting wall
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40
AA Class E 8101	AA4

Technical Data - continued


Manufacturer

Schrack


Dimensions (mm)

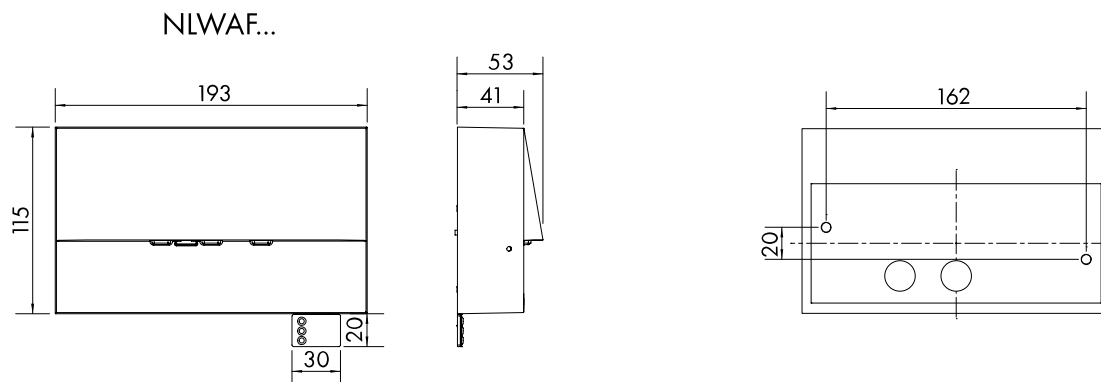

Floor plan illumination for wall mounting with mounting height 2,0m, maintenance factor 0,8

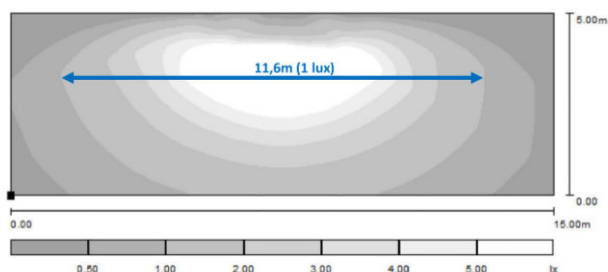

Floor plan illumination for wall mounting with mounting height 0,5m, maintenance factor 0,8

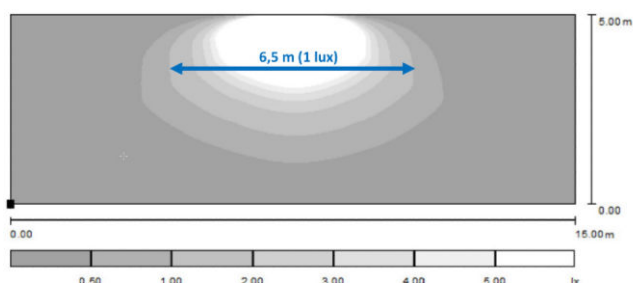

DESCRIPTION	Order No.
Emergency luminaire WAF anthrac. ERT-LED 3x1W 230V AC/DC EL Wall surface mounting, with supervision - centrally switchable, 420lm	NLWAF29EL