

Data Sheet for Article: NLWEFA29EL

Emergency luminaire WEF anthrac. ERT-LED

3x1W 230V AC/DC EL


Wall recessed mounting, with supervision - centrally switchable, 420lm




Technical Data

Net length (mm)	166,00
Net height (mm)	106,00
Netto depth (mm)	21,00
Net weight (kg)	0,37
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	metal luminaire
Design	WEF
Colour	Anthracite
Illuminant	ERT-LED (3W)
Lumen	420
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
IP Rating	IP20
Impact Resistance	IK07
Mounting	recessed wall mounting
Min. ambient temperature (°C)	-35
Max. ambient temperature (°C)	40
AA Class E 8101	AA3 AA4 AA5
Manufacturer	Schrack


Dimensions (mm)

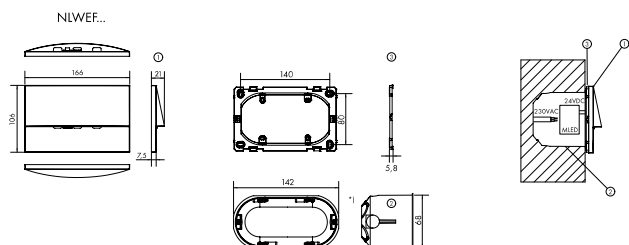

Floor plan illumination for wall mounting with mounting height 2,0m, maintenance factor 0,8

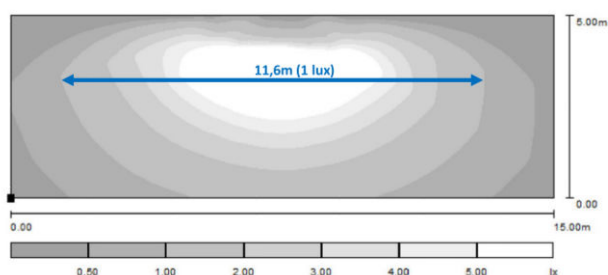

Floor plan illumination for wall mounting with mounting height 0,5m, maintenance factor 0,8

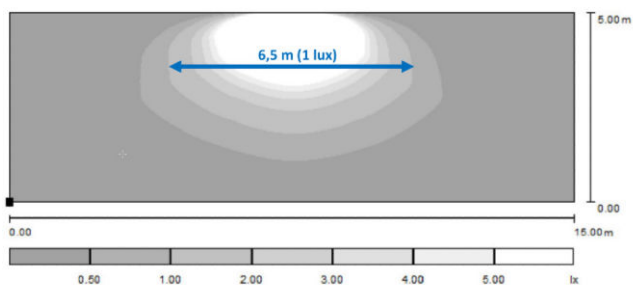

DESCRIPTION	Order No.
Emergency luminaire WEF anthrac. ERT-LED 3x1W 230V AC/DC EL Wall recessed mounting, with supervision - centrally switchable, 420lm	NLWEFA29EL