


Emergency luminaire WFX WL LED IP65 3h 230V AC wall surface

Wall surface, with bayonet chain, Viewing distance: 60m, 230V AC/DC, Note: Delivery without pictogram - required pictogram NLWFXPIK.. must be ordered separately, LiFePO4 battery, radio switchable, WirelessControl Professional type

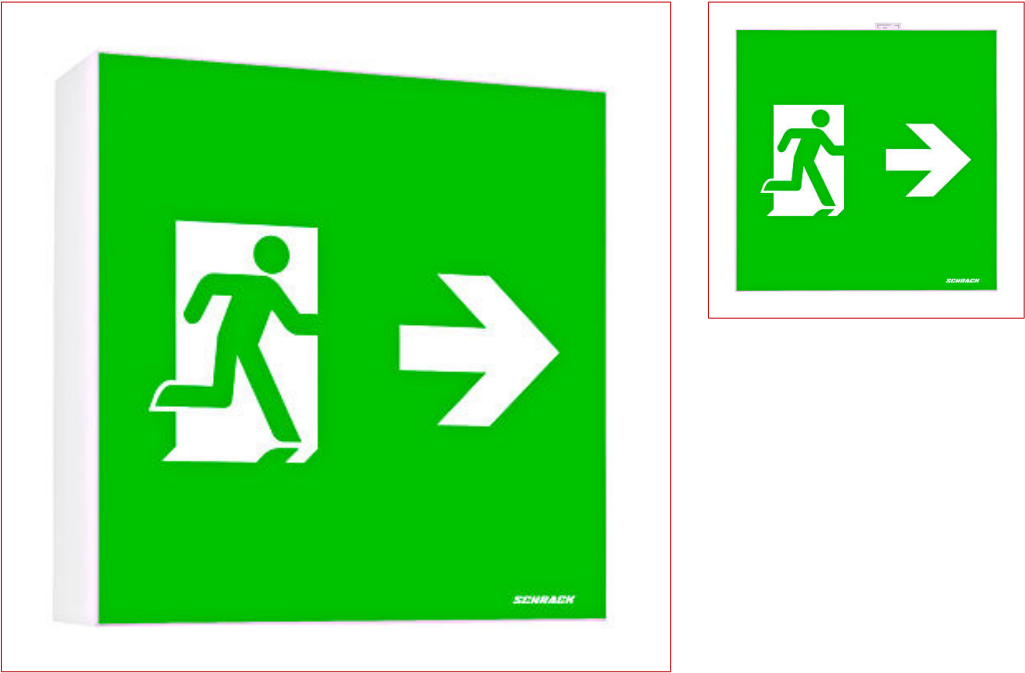




Technical Data

Net length (mm)	300,00
Net width (mm)	300,00
Net height (mm)	110,00
Net weight (kg)	1,40
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	Plastic luminaire
Design	WFX
Colour	White
Pictogram	Required adhesive pictogram according to ISO 7010 to be ordered separately

Technical Data - continued

Viewing distance (m)	60
Backup time (h)	3
Illuminant	LED (5W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	5,70
Power non-maintained mode (W)	0,80
Power max. (W)	7,50
Battery (V/Ah)	3,2/3,3 LiFePO4
IP Rating	IP65
Impact Resistance	IK04
Mounting	surface mounting wall
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

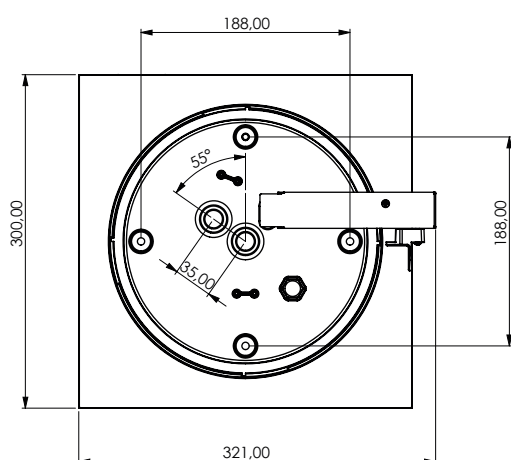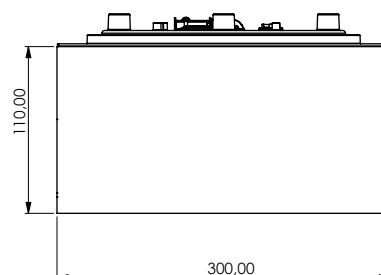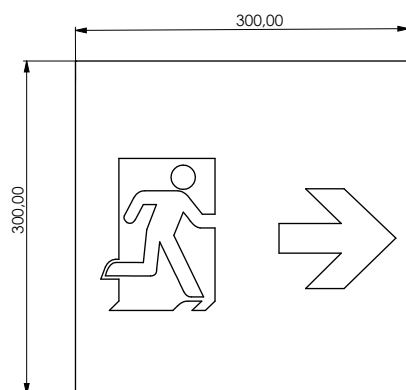

Article Table

DESCRIPTION	Order No.
Emergency luminaire WFX WL LED IP65 3h 230V AC wall surface Wall surface, with bayonet chain, Viewing distance: 60m, 230V AC/DC, Note: Delivery without pictogram - required pictogram NLWFXPIK.. must be ordered separately, LiFePO4 battery, radio switchable, WirelessControl Professional type	NLWFXW403W
Necessary Accessories	
Adhesive pictogram arrow left for WFX Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKLI
Adhesive pictogram arrow up for WFX Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKOB
Adhesive pictogram arrow right for WFX Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKRE
Adhesive pictogram arrow down for WFX Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKUN
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV
Optional Accessories	
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU323L