

Self-contained luminaire WG self-contr. LED 3h 230V AC

Ceiling surface mounting. Optional: chain, rope or pendant mounting, 1h/3h adjustable; pictograms with arrows left, down, up are already mounted, viewing distance: 46m




Technical Data

Net length (mm)	237,00
Net width (mm)	237,00
Net height (mm)	237,00
Net weight (kg)	1,00
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	WG
Colour	White
Viewing distance (m)	30
Backup time (h)	8
Illuminant	LED (3W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	4,8/2,0 NiMh
IP Rating	IP40
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

NLWG...

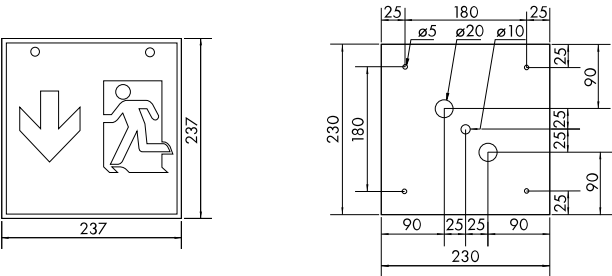

Article Table

DESCRIPTION	Order No.
Self-contained luminaire WG self-contr. LED 3h 230V AC	
Ceiling surface mounting. Optional: chain, rope or pendant mounting, 1h/3h adjustable; pictograms with arrows left, down, up are NLWGD003SC already mounted, viewing distance: 46m	
Optional Accessories	
Chain (4 pcs.) eye set for luminaire Design WG/WX	NLWKO
Pendant 500 mm chrome plated prewired	NL1PV
Accu NiMH 4,8V 2,0Ah for self contained luminaires LED	NLAKKU4820
LPU or LEM module	