

Data Sheet for Article: NLXPIU011S

EX-protect. emerg. lum. design XP EL zone 1/21 LED 1h 230V AC

without pictogram, self control 1 h, wall or ceiling surface mounting, IP66, 750lm, Required accessories: cable gland (NLXPKE), mounting bracket (NLXPMB), chain eyelets (NLXPKO), pictogram set (NLXPPIKTO)




Technical Data

Net length (mm)	485,00
Net height (mm)	197,00
Netto depth (mm)	157,00
Net weight (kg)	4,28
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	explosion proof luminaire
Design	XP
Colour	Grey
Backup time (h)	1
Illuminant	LED (8W)

Technical Data - continued

Lumen	750
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	24
Power non-maintained mode (W)	3
Power max. (W)	24
Battery (V/Ah)	6/1,6 NiCd
IP Rating	IP66
Impact Resistance	IK05
Mounting	surface mounting ceiling surface mounting wall
Min. ambient temperature (°C)	5
Max. ambient temperature (°C)	40
AA Class E 8101	AA5

Dimensioned drawing: EX-protect. emerg. lum. design XP EL zone1/21 LED 1h 230V AC

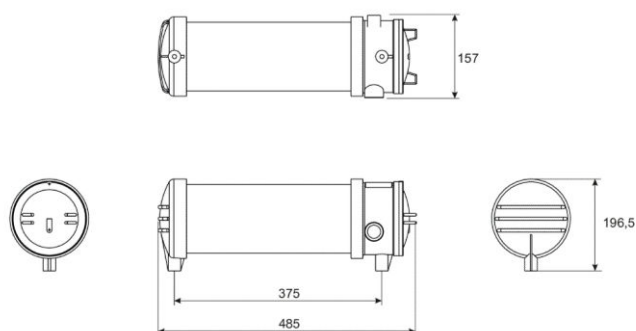

Article Table

DESCRIPTION	Order No.
EX-protect. emerg. lum. design XP EL zone I / 21 LED 1h 230V AC without pictogram, self control 1h, wall or ceiling surface mounting, IP66, 750lm, Required accessories: cable gland (NLXPKE), mounting bracket (NLXPMB), chain eyelets (NLXPKO), pictogram set (NLXPPIKTO)	NLXPIU011S
Optional Accessories	
Cable gland with stain relief for luminaire Design XP Metall	NLXPKE
Chain eyelets (pair) for luminaire design XP	NLXPKO
Mounting bracket (pair) for luminaire design XP	NLXPMB
Pictogram set for NLXP.. left, right, up, down Viewing distance: 14m	NLXPPIKTO