

Data Sheet for Article: NLZAA008WB

# Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect

Wall-mounted, with LiFePO<sub>4</sub> battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication



## Technical Data

|                                  |                          |
|----------------------------------|--------------------------|
| Net length (mm)                  | 315,00                   |
| Net height (mm)                  | 140,00                   |
| Netto depth (mm)                 | 65,00                    |
| Net weight (kg)                  | 2,20                     |
| Luminaire type                   | safety luminaire         |
| Self contained - central battery | Self contained luminaire |
| Function                         | WirelessConnect          |
| Version                          | metal luminaire          |
| Design                           | ZA                       |
| Colour                           | RAL 7016 (anthracite)    |
| Backup time (h)                  | 8                        |
| Illuminant                       | LED (2W)                 |
| Lumen                            | 85                       |


## Technical Data - continued

|                               |                         |
|-------------------------------|-------------------------|
| Voltage range (V)             | 230V AC 50Hz $\pm 20\%$ |
| Power maintained mode (W)     | 3,90                    |
| Power non-maintained mode (W) | 1,50                    |
| Power max. (W)                | 5,30                    |
| Battery (V/Ah)                | 3,2/3,3 LiFePO4         |
| IP Rating                     | IP65                    |
| Impact Resistance             | IK08                    |
| Mounting                      | surface mounting wall   |
| Min. ambient temperature (°C) | -5                      |
| Max. ambient temperature (°C) | 40                      |
| AA Class E 8101               | AA4                     |
| Manufacturer                  | Schrack                 |

## Abmessungen (mm)



## Bohrabstände (mm)

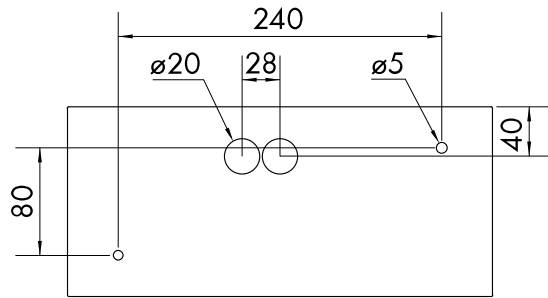

## Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

|                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |  |
| 2,00                                                                              | 0,11                                                                              | 2,3                                                                               | 0,56                                                                              | 7,51                                                                                | 2,07                                                                                |
| 2,50                                                                              | 0,05                                                                              | 2,31                                                                              | 0,54                                                                              | 7,16                                                                                | 1,8                                                                                 |

## Article Table

| DESCRIPTION                                                                                                                                                       | Order No.  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect                                                                                                      | NLZAA008WB |
| Wall-mounted, with LiFePO4 battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication                                             |            |
| <b>Optional Accessories</b>                                                                                                                                       |            |
| Accu LiFePO4 3,2V 3,3Ah for LED luminaire                                                                                                                         | NLAKKU3230 |
| For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phosphpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah |            |