

Emergency luminaire ZA Autotest LED 3h, 230V AC

Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, wall mounting




Technical Data

Net length (mm)	315,00
Net height (mm)	140,00
Netto depth (mm)	65,00
Net weight (kg)	2,20
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	SelfControl Low Temperature
Version	metal luminaire
Design	ZA
Colour	Anthracite
Backup time (h)	3
Illuminant	LED (2W)
Lumen	1h: 170;3h: 170;8h: 76
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	3,2/3,0 LiFePO4
IP Rating	IP65
Mounting	surface mounting wall
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	40


Technical Data - continued

AA Class E 8101	AA3
	AA4
	AA5
Manufacturer	Schrack


Dimensions (mm)

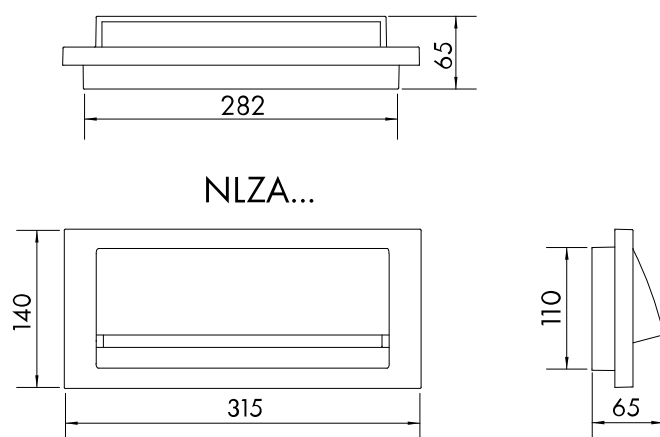

Drilling distances (mm)

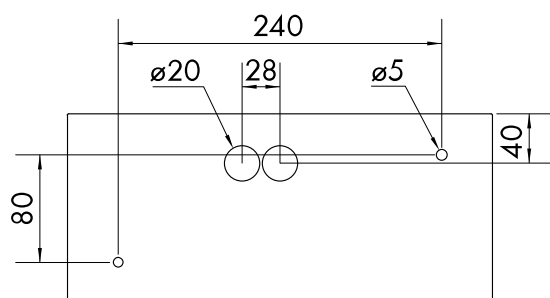

Housing IP54 for COOL-version (mm)

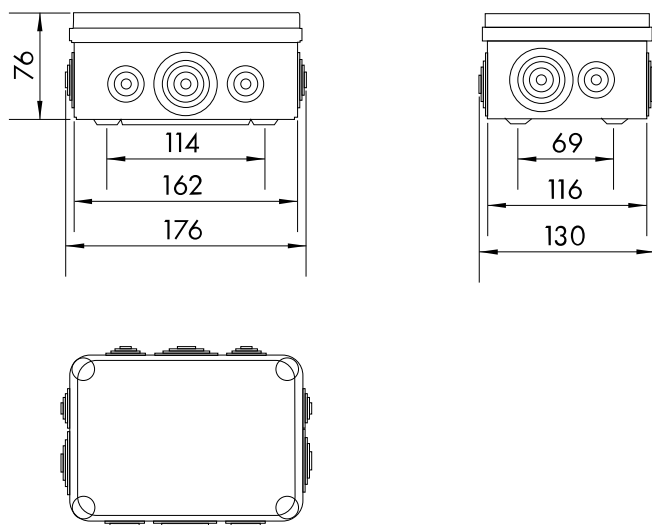

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Article Table

DESCRIPTION	Order No.
Emergency luminaire ZA Autotest LED 3h, 230V AC Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, wall mounting	NLZAAC03SC
Optional Accessories	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230