

Data Sheet for Article: NLZAAC03WB

Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect

Wall surface mounting, with LiFePO₄ battery, battery in external housing for mounting outside the cold area, emergency luminaire, with Bluetooth communication




Technical Data

Net length (mm)	315,00
Net height (mm)	140,00
Netto depth (mm)	65,00
Net weight (kg)	2,20
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessConnect Low Temperature
Version	metal luminaire
Design	ZA
Colour	Anthracite
Backup time (h)	3
Illuminant	LED (2W)
Lumen	170


Technical Data - continued

Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	3,2/3,3 LiFePO4
IP Rating	IP65
Impact Resistance	IK08
Mounting	surface mounting wall
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	40
AA Class E 8101	AA3
	AA4
	AA5
Manufacturer	Schrack


Abmessungen (mm)

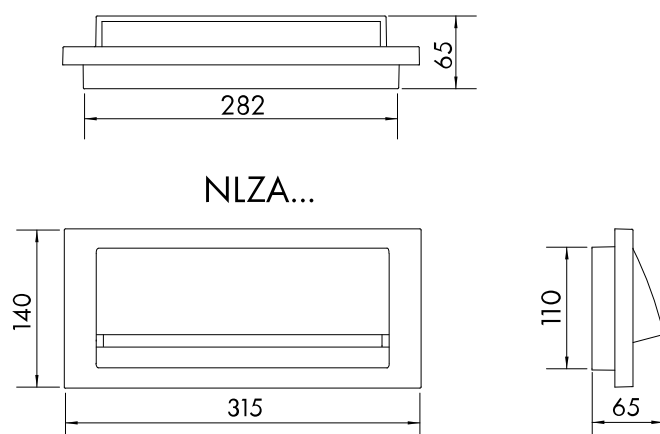

Bohrabstände (mm)

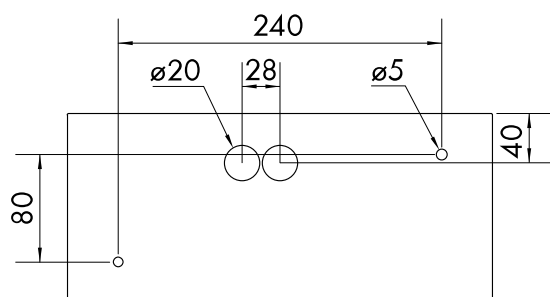

Gehäuse IP54 für COOL-Ausführung (mm)

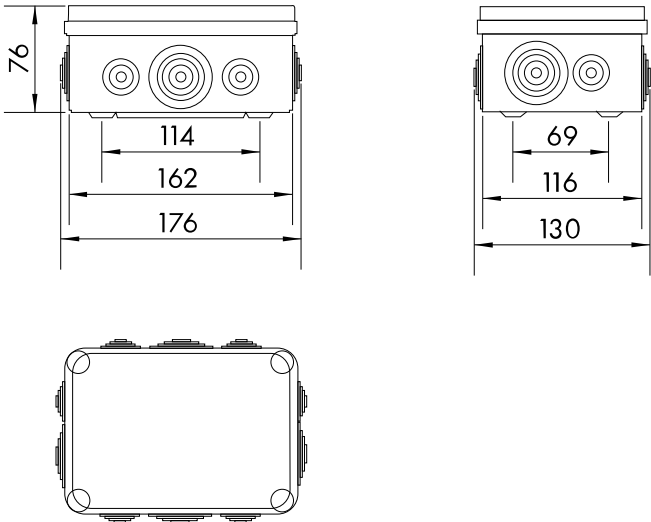

Datei Tabelle: Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect

Montagehöhe [m]					
2,00	0,00	3,03	5,33	10,38	4,29
2,50	0,00	3,20	5,88	11,66	4,70
3,00	0,00	3,29	6,16	12,75	4,80
3,50	0,00	3,27	4,21	12,99	2,73
4,00	0,00	3,29	2,77	11,96	0,00

Article Table

DESCRIPTION	Order No.
Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect	
Wall surface mounting, with LiFePO4 battery, battery in external housing for mounting outside the cold area, emergency luminaire, with Bluetooth communication	NLZAAC03WB
Optional Accessories	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire	
For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230