

Emergency luminaire ZA Wireless LED 3h 230V AC

Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, central switching, wall mounting, WirelessControl Professional type



Technical Data

Net length (mm)	315,00
Net height (mm)	140,00
Netto depth (mm)	65,00
Net weight (kg)	2,20
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Low Temperature
Version	metal luminaire
Design	ZA
Colour	Anthracite
Backup time (h)	3
Illuminant	LED (2W)
Lumen	170
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	3,2/3,0 LiFePO4
IP Rating	IP65
Mounting	surface mounting wall
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	40

Technical Data - continued

AA Class E 8101

AA3

AA4

AA5


Manufacturer

Schrack


Dimensions (mm)



Drilling distances (mm)

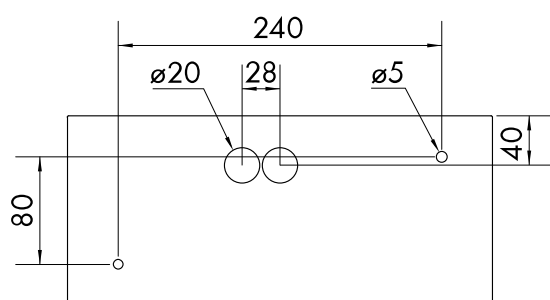

Housing IP54 for COOL-version (mm)

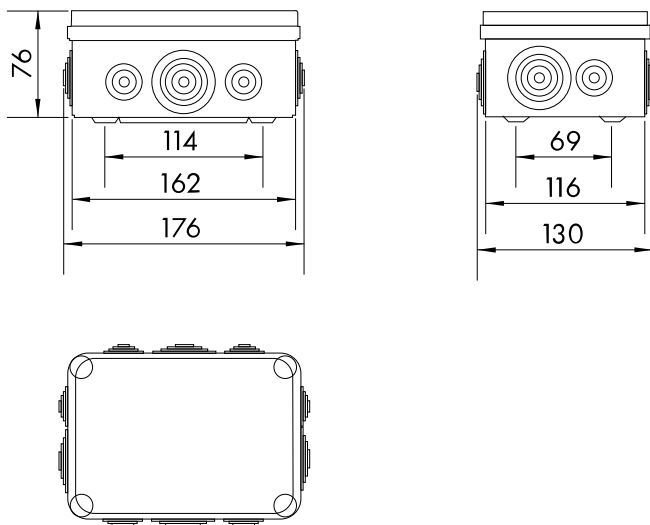

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	0,00	3,03	5,33	10,38	4,29
2,50	0,00	3,20	5,88	11,66	4,70
3,00	0,00	3,29	6,16	12,75	4,80
3,50	0,00	3,27	4,21	12,99	2,73
4,00	0,00	3,29	2,77	11,96	0,00

Article Table

DESCRIPTION	Order No.
Emergency luminaire ZA Wireless LED 3h 230V AC Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, central switching, wall mounting, WirelessControl Professional type	NLZAAC03WL
Optional Accessories	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230