

Data Sheet for Article: NLZAAC08WB

Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect

Wall surface mounting, with LiFePO4 battery, battery in external housing for mounting outside the cold area, emergency luminaire for illuminating round surfaces, with Bluetooth communication




Technical Data

Net length (mm)	315,00
Net height (mm)	140,00
Netto depth (mm)	65,00
Net weight (kg)	2,20
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessConnect Cool Version
Version	metal luminaire
Design	ZA
Colour	Anthracite
Backup time (h)	8
Illuminant	LED (2W)


Technical Data - continued

Lumen	76
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	3,2/3,3 LiFePO4
IP Rating	IP65
Mounting	surface mounting wall
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	40
AA Class E 8101	AA3 AA4 AA5
Manufacturer	Schrack


Abmessungen (mm)

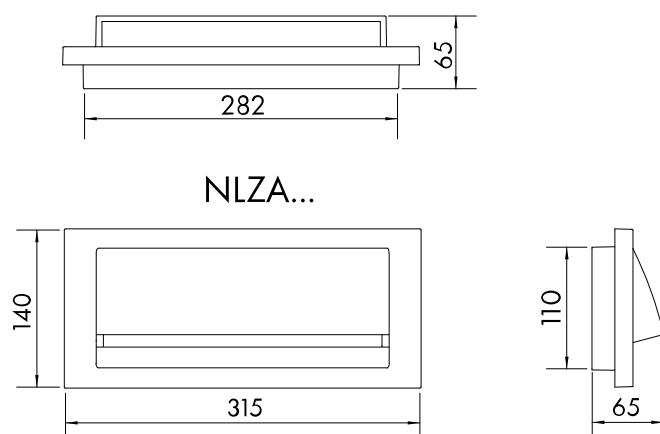

Bohrabstände (mm)

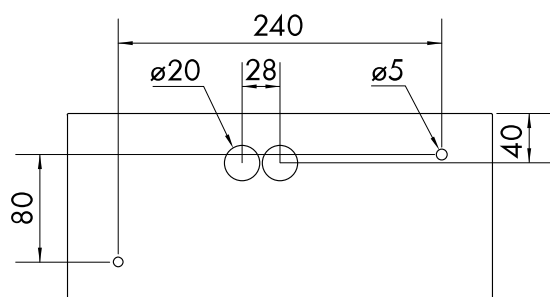

Gehäuse IP54 für COOL-Ausführung (mm)

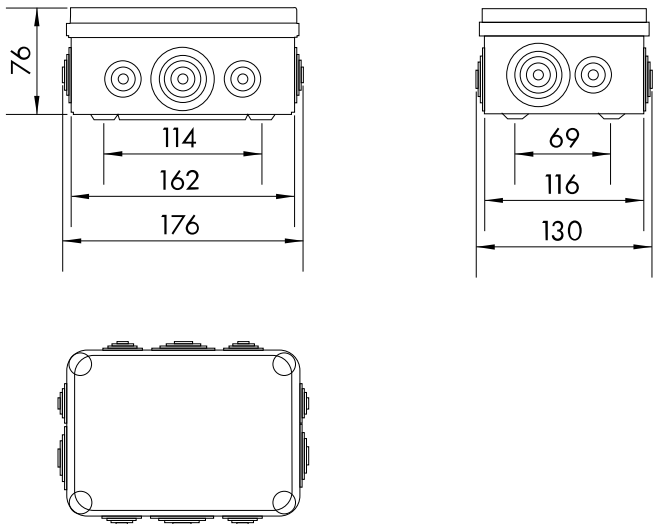

**Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie: 1lx -
Wartungsfaktor 0,80 -8h Autonomiezeit**

Montagehöhe [m]					
2,00	0,00	2,20	4,12	8,52	3,20
2,50	0,00	2,18	2,59	8,11	1,62
3,00	0,00	2,13	0,54	6,42	0,00
3,50	0,00	1,90	0,21	3,00	0,00
4,00	0,00	0,00	0,00	0,00	0,00

Article Table

DESCRIPTION	Order No.
Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect Wall surface mounting, with LiFePO4 battery, battery in external housing for mounting outside the cold area, emergency luminaire for illuminating round surfaces, with Bluetooth communication	NLZAAC08WB
Optional Accessories	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire KM,KSC,KMB,ASM,ZAW LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230