

Data Sheet for Article: NLZAW003WB

Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect

Wall surface mounting, with LiFePO₄ battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication, 170lm




Technical Data

Net length (mm)	315,00
Net height (mm)	140,00
Netto depth (mm)	65,00
Net weight (kg)	2,20
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessConnect
Version	metal luminaire
Design	ZA
Colour	White
Backup time (h)	3
Illuminant	LED (2W)
Lumen	170


Technical Data - continued

Voltage range (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Battery (V/Ah)	3,2/3,3 LiFePO4
IP Rating	IP65
Impact Resistance	IK08
Mounting	surface mounting wall
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Abmessungen (mm)

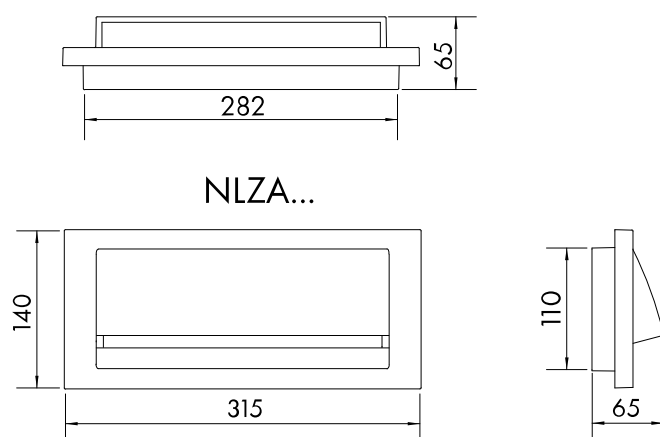

Bohrabstände (mm)

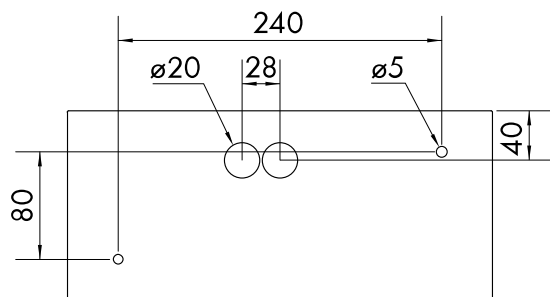

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Article Table

DESCRIPTION	Order No.
Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect Wall surface mounting, with LiFePO4 battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication, 170lm	NLZAW003WB
Optional Accessories	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230