

Data Sheet for Article: NLZAW008WB

Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect

Wall-mounted, with LiFePO₄ battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication, 85lm




Technical Data

Net length (mm)	315,00
Net height (mm)	140,00
Netto depth (mm)	65,00
Net weight (kg)	2,20
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessConnect
Version	metal luminaire
Design	ZA
Colour	RAL 9003 (white)
Backup time (h)	8
Illuminant	LED (2W)
Lumen	85


Technical Data - continued

Voltage range (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Battery (V/Ah)	3,2/3,3 LiFePO4
IP Rating	IP65
Impact Resistance	IK08
Mounting	surface mounting wall
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Abmessungen (mm)

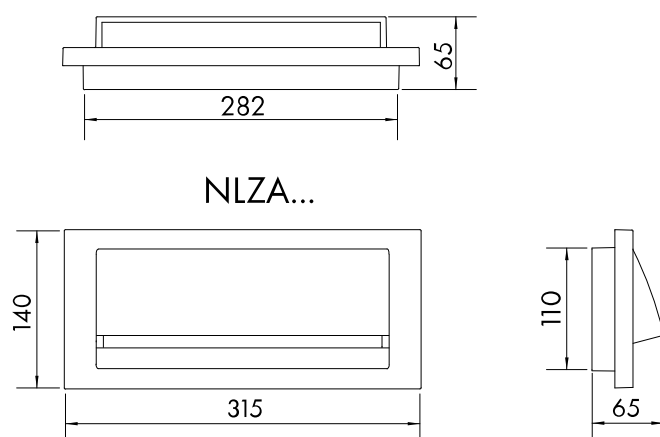

Bohrabstände (mm)

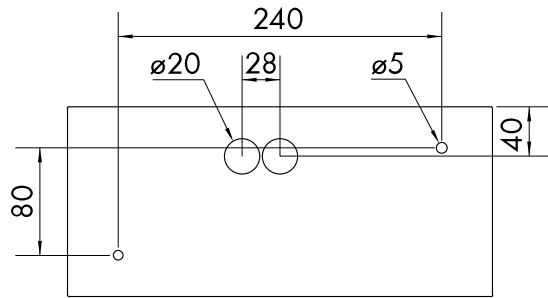

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	0,11	2,3	0,56	7,51	2,07
2,50	0,05	2,31	0,54	7,16	1,8

Article Table

DESCRIPTION	Order No.
Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect	
Wall-mounted, with LiFePO4 battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication, 85lm	NLZAW008WB
Optional Accessories	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire	
For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phosphphate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230