

Data Sheet for Article: RPS42024--

PCB Relay, 2 CO, 8A, 24VDC, 5mm, Plastic sealed

S-Relay, series RPS



Technical Data


Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	85
Switching contacts	2 CO
Rated current [Resistive load] (A)	8
Rated voltage [Resistive load]	250VAC
Switching capacity [Resistive]	2000VA
Contact material	AgNi
Initial contact resistance (Ohm)	≤100mΩ (1A 6VDC)
Electrical endurance (Operation cycle)	50000
Mechanical durability	10000000 Operating cycles
Insulation resistance (MΩ*km)	1000MΩ (500VDC)
Initial breakdown voltage	
Between open contacts	1000VAC 1min
Between poles	2500VAC 1min
Between contact and coil	5000VAC 1min
Humidity (%)	5% - 85% RH
Vibration resistance	10Hz - 150Hz 10g/5g

Technical Data - continued

Coil information

Rated voltage	24V-DC
Coil resistance	1440Ω
Net weight (kg)	0,01
Power loss (W)	0,40

Dimensioned drawing: PCB Relay, 2 CO, 8A, 24VDC, 5mm, Plastic sealed

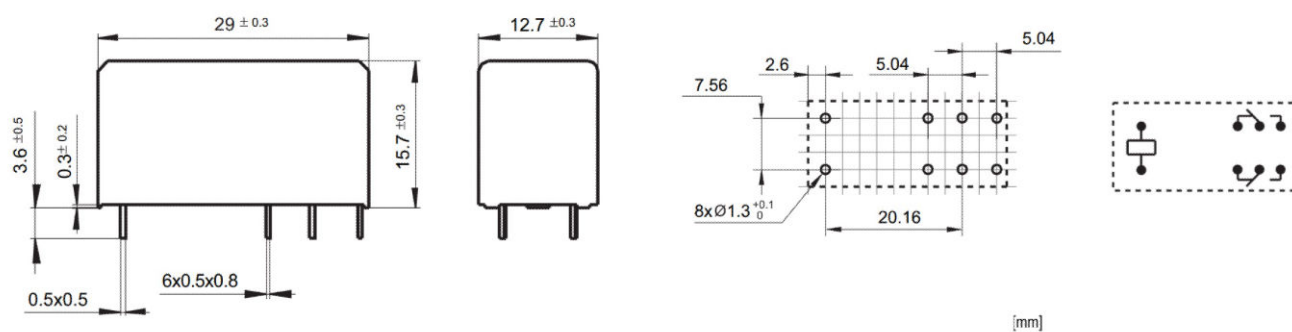

Article Table

DESCRIPTION	Order No.
PCB Relay, 2 CO, 8A, 24VDC, 5mm, Plastic sealed S-Relay, series RPS	RPS42024
Optional Accessories	
Screw Type terminal socket I/O with pinning 5mm S-Relay, for RT3 and RT4 relays, logical arrangement	YRTS0626