

Screw Type terminal socket I/O with pinning 5mm

S-Relay, for RT3 and RT4 relays, logical arrangement; For the use of 1-pole RT3 relays with a rated current of 12 A or 16 A, the terminals must be bridged as follows: 21 with 11, 24 with 14, and 22 with 12.



Technical Data

Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	85
IP Rating	IP20
Pollution degree	3
Switching contacts	2 CO 1 CO
Connection type	Screw clamps
Initial breakdown voltage	
Between poles	2500 V/min
Between contact and coil	4000 V/min
Rated voltage	300V
Rated current (A)	10
Max. tightening torque (Nm)	1
Net weight (kg)	0,04


Technical Data - continued

Temperature range - Operation (°C)	-40 to +85
Solid wire diameter (mm²)	0.5 - 2.5
Flexible wire diameter (mm²)	0.5 - 2.5
Flexible wire with ferrule (diameter) (mm²)	0.5 - 2.5


Additional information

Note:	For the use of 1-pole RT3 relays with a rated current of 12 A or 16 A, the terminals must be bridged as follows: 21 with 11, 24 with 14, and 22 with 12.
--------------	---


Circuit diagram

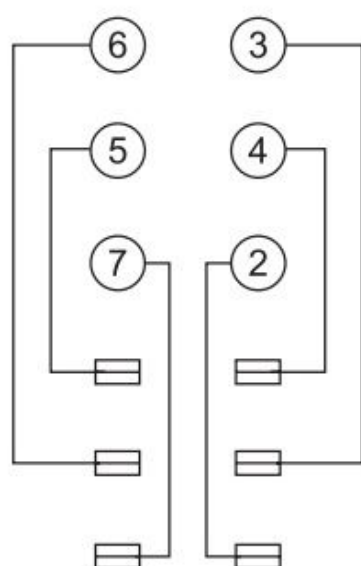

① ⑧ : A1 A2
 ② ⑦ : NC
 ④ ⑤ : NO
 ③ ⑥ : COM

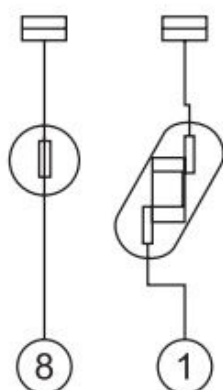

Dimension drawing

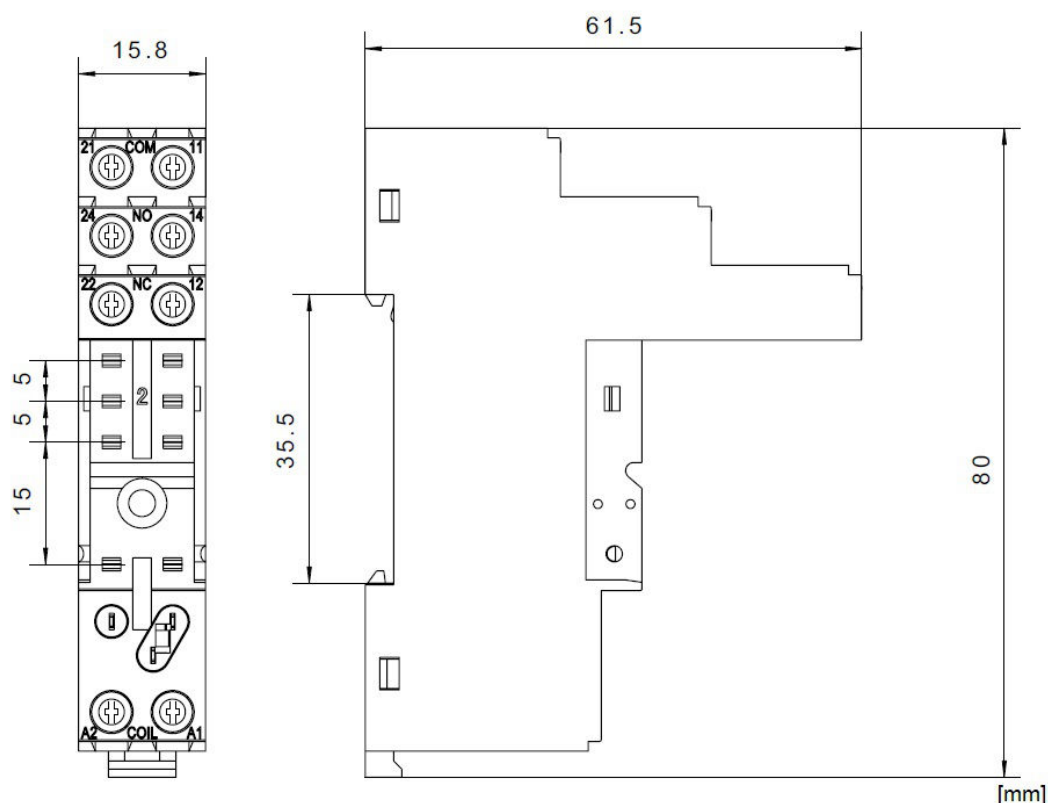

Article Table

DESCRIPTION	Order No.
Screw Type terminal socket I/O with pinning 5mm	
S-Relay, for RT3 and RT4 relays, logical arrangement; For the use of 1-pole RT3 relays with a rated current of 12 A or 16 A, the terminals must be bridged as follows: 21 with 11, 24 with 14, and 22 with 12.	YRTS0626
Optional Accessories	
Retaining clip for RT2, RT3, RT4 relays	
S-Relay	YRTS4000
Bus jumper for YRXT screw socket	
S-Relay, Serie RXT	YRXT6000
Protection diode module 6-250VDC for S-Relay socket	
S-Relay	YRS13250
LED+PD module green 6-24VDC A1+ for S-Relay socket	
S-Relay	YRS12024
LED module green 110-240VAC for S-Relay socket	
S-Relay	YRS11730
RC-Network module 6-24VAC for S-Relay socket	
S-Relay	YRS14524

Article Table

DESCRIPTION	Order No.
Optional Accessories	
RC-Network module 110-240VAC for S-Relay socket S-Relay	YRS14730
LED+PD module red 6-24VDC A1+ for S-Relay socket S-Relay	YRS16024
LED module green 24VAC/DC for S-Relay socket S-Relay	YRS11524
LED module red, 110-240VAC for S-Relay socket S-Relay	YRS15730
Marking tag for YRXT and YRTS socket S-Relay	YRXT2000