

Data Sheet for Article: YRTS8024--

Socket with spring terminals, 5mm, logical, 24VAC/DC

S-Relay, for RT relays, 300VAC, 8A, with integrated LED and FD



Schrack-Info

- Relay socket with LED indicator
- Spring terminals - terminal cross-sections from 0.5 mm² to 2.5 mm²
- DIN rail mounted plug-in socket with logical arrangement
- Easy installation and clear circuit labeling


Technical Data

Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	85
Product standard	EN 61984
Connection type	Spring terminals
Initial breakdown voltage	
Between poles	2000 V/min
Between contact and coil	4000 V/min
Rated voltage	300VAC
Rated current (A)	8
Control voltage DC	6-24 V
Net weight (kg)	0,03


Technical Data - continued

Solid wire diameter (mm ²)	0.5 - 2.5
Flexible wire diameter (mm ²)	0.5 - 2.5
Flexible wire with ferrule (diameter) (mm ²)	0.5 - 2.5

Circuit diagram

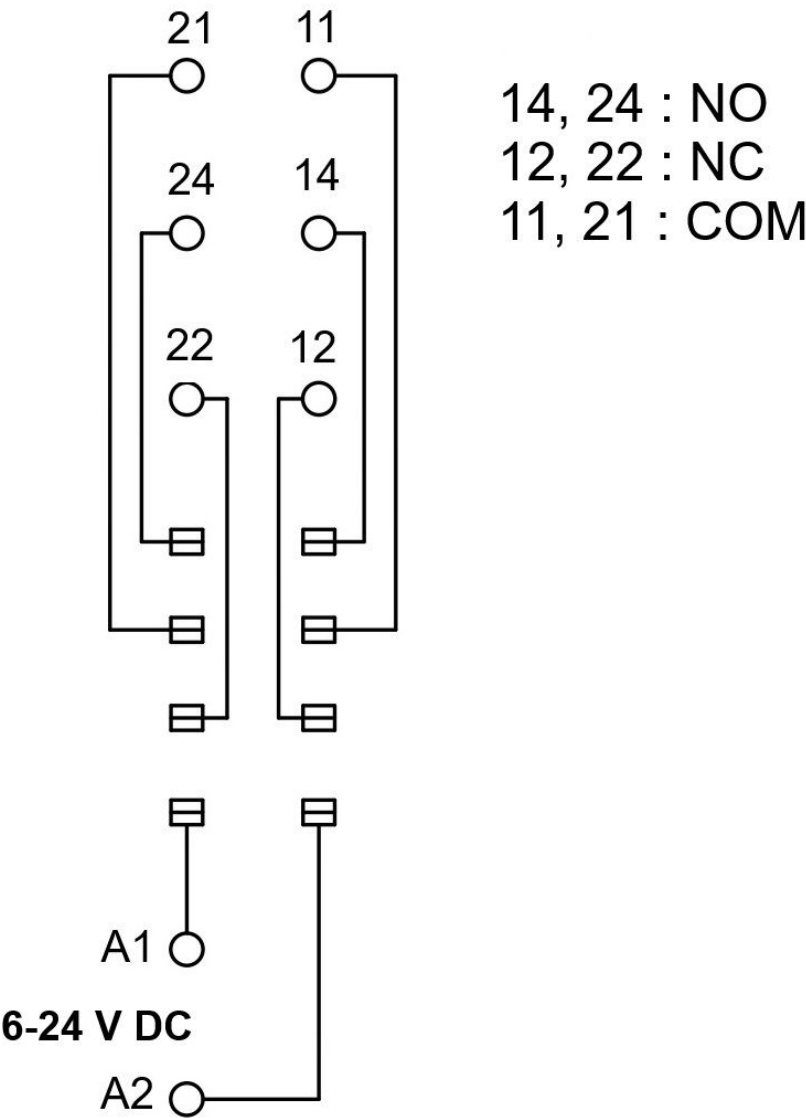

Dimensions

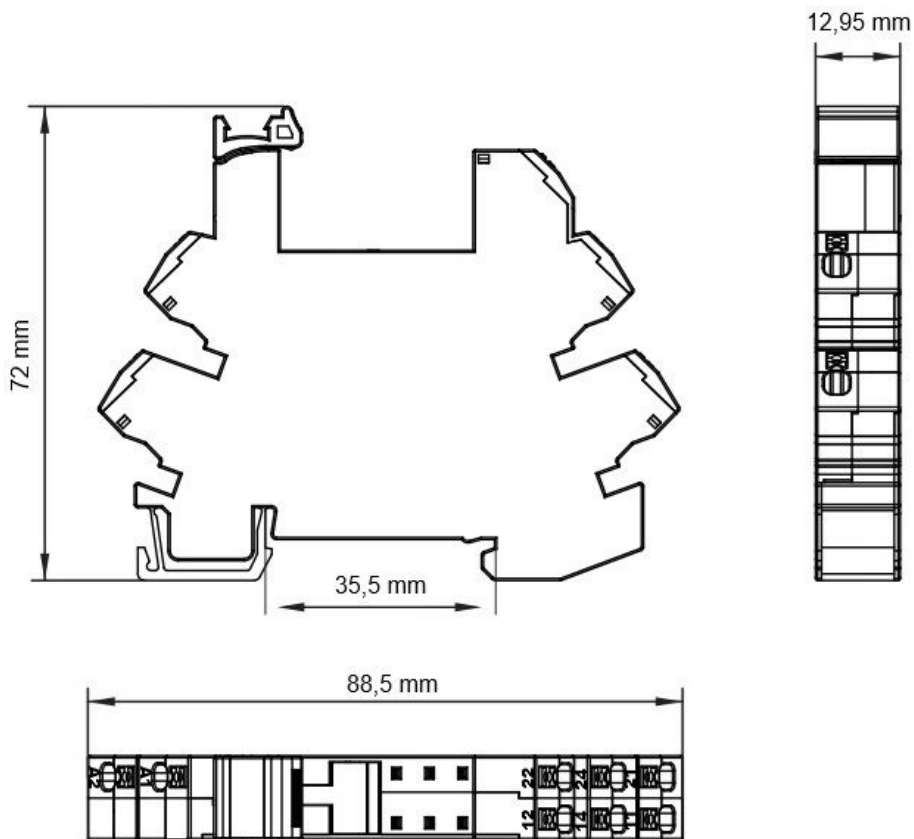

Article Table

DESCRIPTION	Order No.
Socket with spring terminals, 5mm, logical, 24VAC/DC	YRTS8024
S-Relay, for RT relays, 300VAC, 8A, with integrated LED and FD	
Optional Accessories	
Jumper bar, for connection of up to 10 YRTS8-sockets	YRTS8000
S-Relais, Serie RT	