

Data Sheet for Article: YRXT1010--

Screw socket, logical arrangement for 1-pole RXT relay


S-Relay, RXT series




Technical Data

Min. ambient temperature (°C)	-45
Max. ambient temperature (°C)	85
IP Rating	IP20
Pollution degree	3
Contact current (A)	16
Rated current [Resistive load] (A)	16
Connection type	Screw clamps
Between poles	2500V/s
Between contact and coil	4000V/s
Rated voltage	300VAC
Max. tightening torque (Nm)	1
Dielectric strength	-
Net weight (kg)	0,04
Solid wire diameter (mm ²)	0.5 - 2.5
Flexible wire diameter (mm ²)	0.5 - 2.5
Flexible wire with ferrule (diameter) (mm ²)	0.5 - 2.5

Circuit diagram: Screw socket, logical arrangement for 1-pole RXT relay

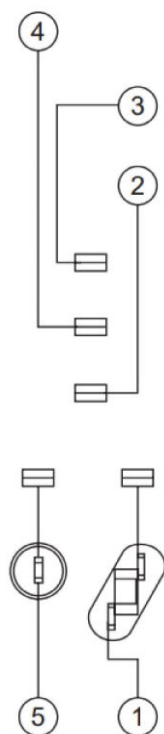

Dimensioned drawing: Screw socket, logical arrangement for 1-pole RXT relay

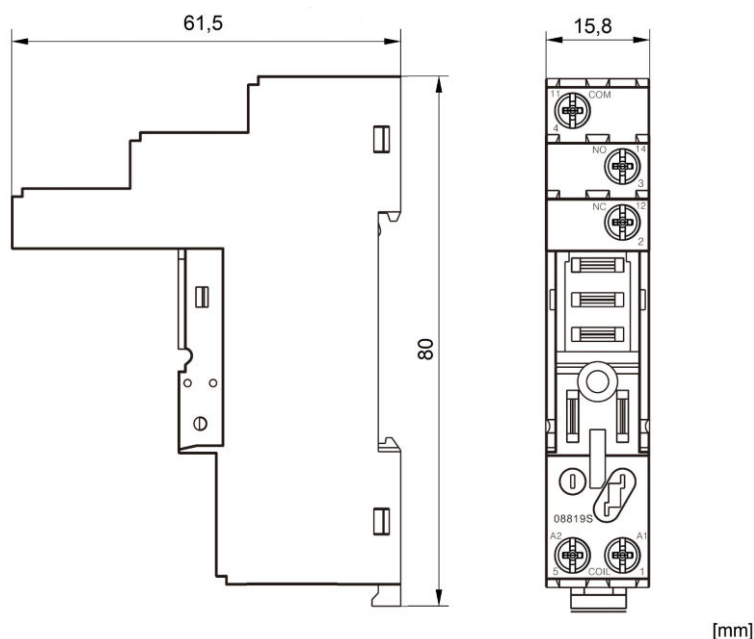

Article Table

DESCRIPTION	Order No.
Screw socket, logical arrangement for 1-pole RXT relay	YRXT1010
S-Relay, RXT series	
Optional Accessories	
Retaining clip for RXT relays	YRXT4000
S-Relay, RXT series	
Marking tag for YRXT and YRTS socket	YRXT2000
S-Relay	
Bus jumper for YRXT screw socket	YRXT6000
S-Relay, Serie RXT	
Protection diode module 6-250VDC for S-Relay socket	YRS13250
S-Relay	
LED+PD module green 6-24VDC A1+ for S-Relay socket	YRS12024
S-Relay	
LED module green 24VAC/DC for S-Relay socket	YRS11524
S-Relay	
LED module green 110-240VAC for S-Relay socket	YRS11730
S-Relay	

Article Table

DESCRIPTION	Order No.
Optional Accessories	
RC-Network module 6-24VAC for S-Relay socket S-Relay	YRS14524
RC-Network module 110-240VAC for S-Relay socket S-Relay	YRS14730
LED+PD module red 6-24VDC A1+ for S-Relay socket S-Relay	YRS16024
LED module red, 110-240VAC for S-Relay socket S-Relay	YRS15730