

Data Sheet for Article: YY734532--

CEE-Plug, with phase inverter, 5-pole, 32A, 400V, IP44

EN 60309-1, EN 60309-2



Schrack-Info

- Easy reversing of phase sequence by turning mechanism
- Degree of protection IP44
- Available in 16A and 32A version
- Especially suitable for dusty and humid environments for harsh environmental conditions




Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Rated current (A)	32
Poles	5
Contact arrangement	3P+N+PE
IP Rating	IP44
Color code	red
Position of the protective earth contact	6h

Technical Data - continued

Rated operating voltage (V)	230/415
Insulation voltage withstand (V)	690
Frequency (Hz)	50/60
Material	PA66 PA6
Contact material	Brass
Connection type	Screw clamps
Standard	EN 60309-1 EN 60309-2
Min. cross section, flexible wire with ferrule (mm ²)	2,50
Max. cross section, flexible wire with ferrule (mm ²)	6
Min. cross section, flexible wire (mm ²)	2,50
Max. cross section, flexible wire (mm ²)	6
Max. cable diameter (mm)	22
Stripping length L/N (mm)	12
Stripping length PE (mm)	17
Max. torque (Nm)	1,20
Glow wire resistance (°C)	650
Impact Resistance	IK07

**Dimensioned drawing: CEE-Plug, with phase inverter, 5-pole, 32A, 400V,
IP44**

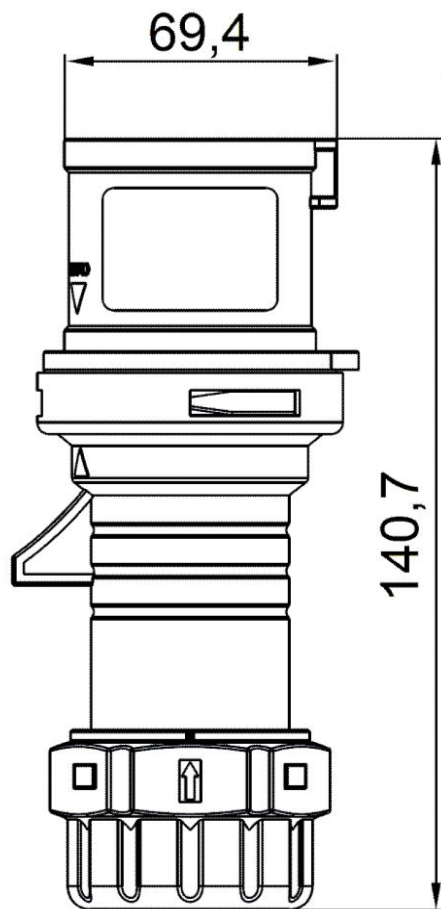

(mm)

DESCRIPTION	Order No.
CEE-Plug, with phase inverter, 5-pole, 32A, 400V, IP44 EN 60309-1, EN 60309-2	YY734532