

Data Sheet for Article: BE300069--

Tariff switch, 3-pole, series TAS, setting range 20, 25, 32A


Switchgear with adjustable current limitation, sealable




Technical Data

Tripping characteristics	Tariff switch
Poles	3
Power loss (W)	11,40
Optional Accessories	BSA90113--;BSA90114--;BE300050--
Amperage (A)	32
Product category	Tariff switch
Product standard	EN 60947-2:2006 + A1:2009 + A2:2013

Circuit diagram: Tariff switch, 3-pole, series TAS, setting range 20, 25, 32A

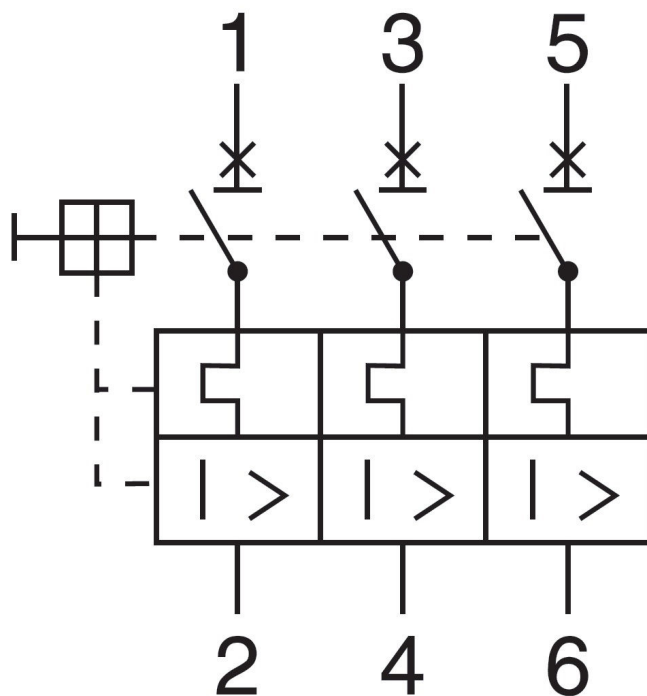

Dimensioned drawing: Tariff switch, 3-pole, series TAS, setting range 20, 25, 32A

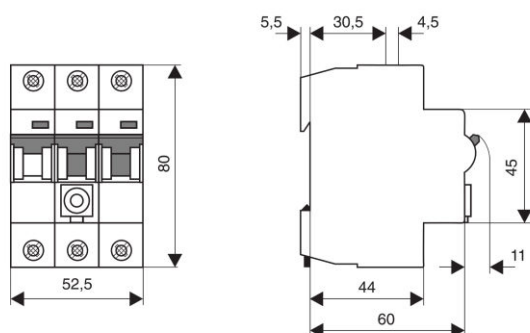

Article Table

DESCRIPTION	COPPER WEIGHT (kg/km)	Order No.
Tariff switch, 3-pole, series TAS, setting range 20, 25, 32A Switchgear with adjustable current limitation, sealable		BE300069
Optional Accessories		
C-Busbar 3-pole, break-out, 10mm ² , 1 m Break-out, shortenable on both sides, TE=17.8mm, suitable for products in the AMPARO and BC, BM and BO series	438	BSA90113
C-Busbar 3-pole, break-out, 16mm ² , 1 m Break-out, shortenable on both sides, TE=17.8mm, suitable for products in the AMPARO and BC, BM and BO series	657	BSA90114
Fork Busbar for Auxiliary c. 3-p., L1/L2/L3/AUX, 16mm ² , 1 m for Motor Protective devices series BE4 and MCBs with Auxiliary Contact	1491	BE300050