


Data Sheet for Article: EV103004--

Dimmer insert 40-400W/VA, RC

Cover EV102013--

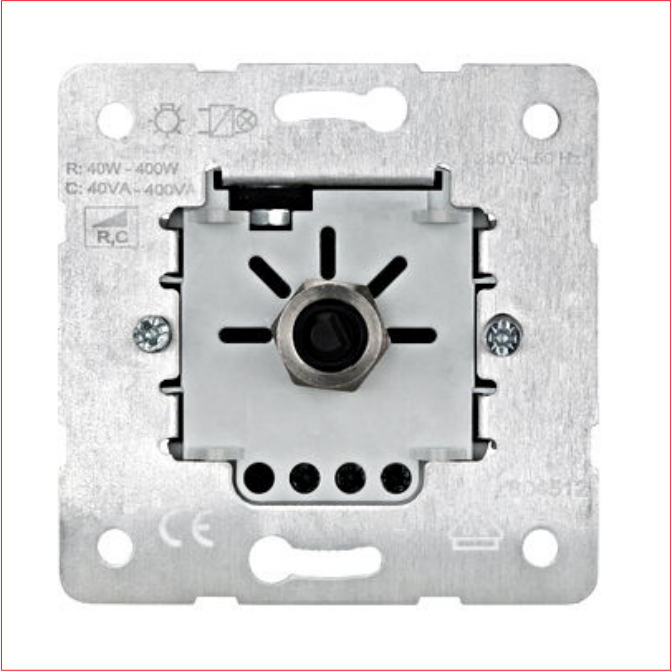

Schrack-Info

Phase cut rotary dimmer with on/off button for resistive or inductive loads. For completion the dimmer cover EV102013--, EV112013-- or EV122013-- must be used. No neutral conductor is required for the connection.



Technical Data

Series	VISIO 50
Product typ	Dimmer
Dimmertyp	Leading edge dimmer
Load type	Ohmic Capacitive
Dimmable illuminants	Low voltage halogen lamp with electronic transformer Incandescent lamp High voltage halogen lamp
Power range	40-400 W/VA
Operating voltage AC (V)	230
mounting	Screws and claws
Mounting method	Flush-mounted

Technical Data - continued


Operating temperature	0°C to +35°C
Safety function	Electronic short-circuit protection Reversible electronic overload protection
IP Rating	IP20
Connection type	Screw clamps
Connection clamps	according to EN 60669-1
Allowed cables	Flexible with end splice Flexible Stiff
Allowed cross-section (mm²)	1,5 und 2,5
Material	ABS Galvanized steel
Environment	Halogen free
Sustainability	ROHS
test mark	VDE
Dimensions (mm)	70x70x40
Mounting depth (mm)	35

Dimmleistung


							
Min.	40 W	40 W	-	40 VA	-	-	-
Max.	400 W	400 W	-	400 VA	-	-	-

- 1 ... Glühlampe
 2 ... Halogenlampe
 3 ... konventioneller Transformator
 4 ... elektronischer Transformator
 5 ... dimmbare Energiesparlampe CFL
 6 ... dimmbare 230V LED-Lampe
 7 ... dimmbare 12V LED-Lampe

Anschlussplan

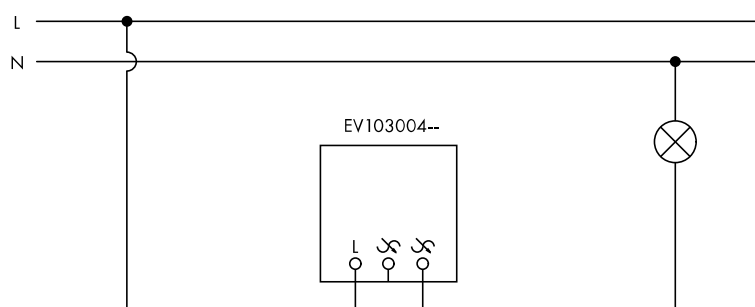

Abmessungen (mm)

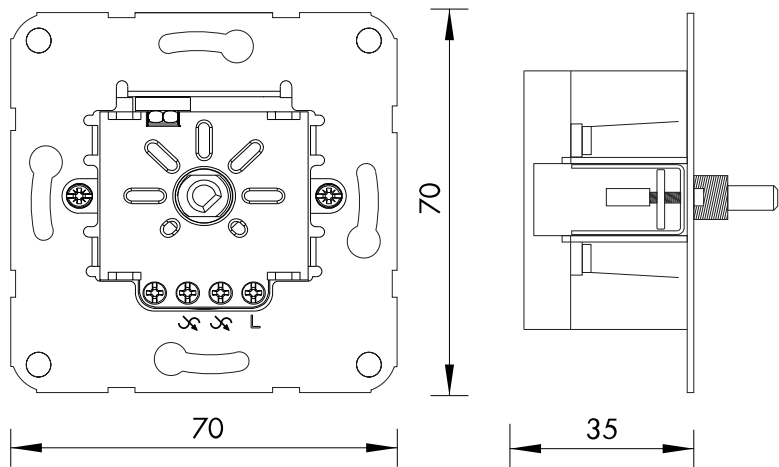

Article Table

DESCRIPTION	Order No.
Dimmer insert 40-400W/VA, RC	
Cover EV102013--	EV103004