

Data Sheet for Article: IS503047--

TYTAN T4P, D02 Fuse switch disconnecter, 3+N, complete, 40A


for emergency power supply, fixed insert, with: thermal monitoring, flashing indicator, fuse plugs, fixed sleeves and fuses




Technical Data

Net width (mm)	72,00
Net height (mm)	84,00
Netto depth (mm)	76,00
Net weight (kg)	0,41
EAN	9004840908060
Power loss (W)	18,50
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Amperage (A)	40
Poles	3+N
Basic Description	Fuse

Circuit diagram: TYTAN T4P, D02 Fuse switch disconnecter, 3+N, complete, 40A



Dimensioned drawing: TYTAN T4P, D02 Fuse switch disconnecter, 3+N, complete, 40A

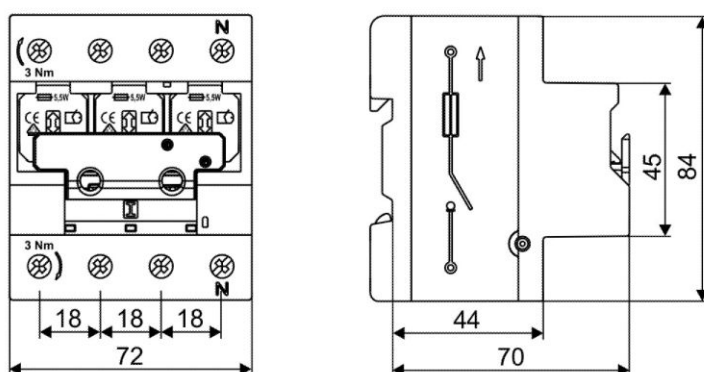

Article Table

DESCRIPTION	COPPER WEIGHT (kg/km)	Order No.
TYTAN T4P, D02 Fuse switch disconnecter, 3+N, complete, 40A for emergency power supply, fixed insert, with: thermal monitoring, flashing indicator, fuse plugs, fixed sleeves and fuses		IS503047
Optional Accessories		
TYTAN T, Busbar C-version 16mm ² / MW=17.8mm, 3+N, 1 m For D02 fuse switch-disconnectors of the Tytan T series	1201	BS927146
Adapting D01/D02		ISF90299