

Data Sheet for Article: IKB01025N-

Neutral branch terminal, 1-pole, 100A, in.2x25mm², out.6x10mm²

Input terminal 2 x 25mm², outgoing terminals 6 x 1.5 - 10mm²


Technical Data

Netto depth (mm)	50,00
Net width (mm)	29,00
Net height (mm)	54,00
Net weight (kg)	0,10
EAN	9004840970340
Power loss (W)	0,30
Basic Description	Terminal
Product standard	EN 60947-7-1
Rated voltage	1000VAC
Current carrying capacity (A)	101A

Technical data

Standards:	IEC 60947-7-1			
current carrying capacity:	Cu 101A			
Rated cross-section:	25mm ²			
Terminal cross section:	no. of connections: 2x 25mm ² (all conductor types)			
	IEC 60947-7-1		IEC 61238-1	
	Cu		Al	
	compact stranded	stranded with ferrule		
	25mm ²	/	/	
	16mm ²	3Nm		
	10mm ²			
	6mm ²			
	4mm ²			
	2,5mm ²	3Nm	/	
	1,5mm ²			/
stripping length	17mm			
screw	2xM6 +/- PZ2			
Terminal cross section:	no. of connections: 6x10mm2 (all conductor types)			
	10mm ²	/	/	
	6mm ²	2Nm		
	4mm ²			
	2,5mm ²			
	1,5mm ²			
	stripping length	9mm		
	screw	M5 +/- PZ2		
	Materials:	Terminal body:	Brass (CuZn39Pb2)	blank
		Housing:	PA 6 (Halogenfrei)	
		Screws	Steel	zinc plated
Flame resistance:	Self-extinguishing			
Construction:	Fingersafe IP 20			

Dimensioned drawing: Neutral branch terminal, 1-pole, 100A, in.2x25mm², out.6x10mm²

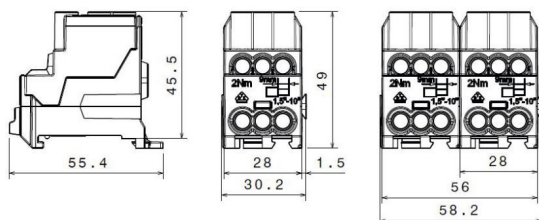

DESCRIPTION	Order No.
Neutral branch terminal, 1-pole, 100A, in.2x25mm ² ,out.6x10mm ² Input terminal 2 x 25mm ² , outgoing terminals 6 x 1.5 - 10mm ²	IKB01025N