

Emergency luminaire EE 1x1W ERT-LED 230V AC/DC hallway


White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate rescue hallways with a luminaire distance of 18m at a mounting high of 3,5m, with supervision - centrally switchable



Technical Data

Net height (mm)	23,00
Net diameter (mm)	88,00
Net weight (kg)	0,30
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	metal luminaire
Design	EE
Colour	White
Illuminant	ERT-LED (1W)
Lumen	140
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
IP Rating	IP20
Mounting	recessed mounting ceiling
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4

Dimensions (mm)

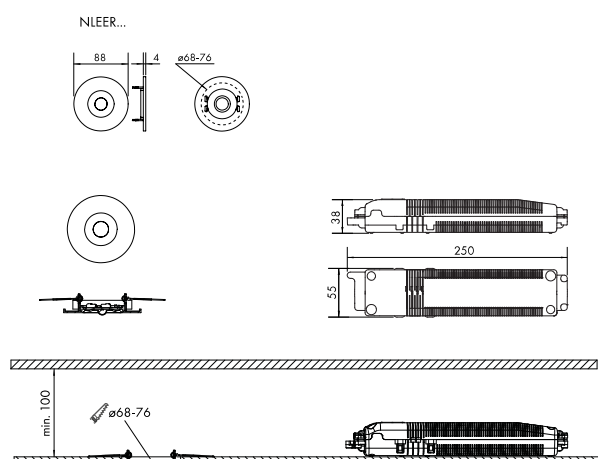

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	6,16	15,89	12,84	4,92	1,80
2,50	6,19	17,44	13,32	5,08	1,75
3,00	5,41	18,17	12,00	5,13	1,60
3,50	4,48	18,19	10,53	5,05	1,34
4,00	3,13	16,75	8,72	4,81	1,00

Article Table

DESCRIPTION	Order No.
Emergency luminaire EE 1x1W ERT-LED 230V AC/DC hallway White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate rescue hallways with a luminaire distance of 18m at a mounting high of 3,5m, with supervision - centrally switchable	NLEERF029E
Optional Accessories	
Cover for emergency luminaires Design EE white, square Incl. 2 metal springs	NLEEQWS
Cover for emergency luminaires Design EE anthracite, square Incl. 2 metal springs	NLEEQAZ
Cover for emergency luminaires Design EE anthracite, round Incl. 2 metal springs	NLEERAZ